

G

ÜRÜN TİPİ
PRODUCT TYPE

30

POMPA SERİSİ
PUMP SERIES

LİTRE

LİTER

KAPAK TİPİ

COVER TYPE

ŞAFT TİPİ

SHAFT TYPE

DÖNÜŞ YÖNÜ

ROTATION

GİRİŞ ÇIKIŞ DELİKLERİ

INLET/OUTLET PORTS

17	17.2 cm ³ /rev
22	22.15 cm ³ /rev
27	27.3 cm ³ /rev
34	33.8 cm ³ /rev
43	43.8 cm ³ /rev
51	51.73 cm ³ /rev
61	61.95 cm ³ /rev
73	72.88 cm ³ /rev
82	82.13 cm ³ /rev
100	102.50 cm ³ /rev
125	127.50 cm ³ /rev


S	4 Delikli ISO 4 Holes ISO	
U	3 Delikli UNI 3 Holes UNI	
F	3 Delikli F-UNI 3 Holes F-UNI	
D	6 Delikli D-UNI 6 Holes D-UNI	
K	4 Delikli K 4 Holes K	
B	2+4 SAE B 2+4 SAE B	

Bk. Sayfa
See Page


F1	8x32x35 DIN ISO 14	
F2	1-3/8" ASAE DIN 9611	
F3	1-3/8" ASAE DIN 9611	
F4	6x21x25 21 UNI 222	
F5	13 Teeth SAE J4988	
F6	15 Teeth SAE J4988	
F8	1-3/8" ASAE DIN 9611	
K1	6.35x6.35x25.4 Kamalı Şaft Keyed Shaft	
K2	4.79x4.79x32 Kamalı Şaft Keyed Shaft	
K3	6.35x6.35x31.8 Kamalı Şaft Keyed Shaft	
K4	6x6x25 Kamalı Şaft Keyed Shaft	
K5	6x6x25 Kamalı Şaft Keyed Shaft	
K6	1:8 Konik Kamalı Şaft Tapered Keyed Shaft	

Bk. Sayfa
See Page


Sağ Dönüşlü Pompa
Clockwise Rotation Pump

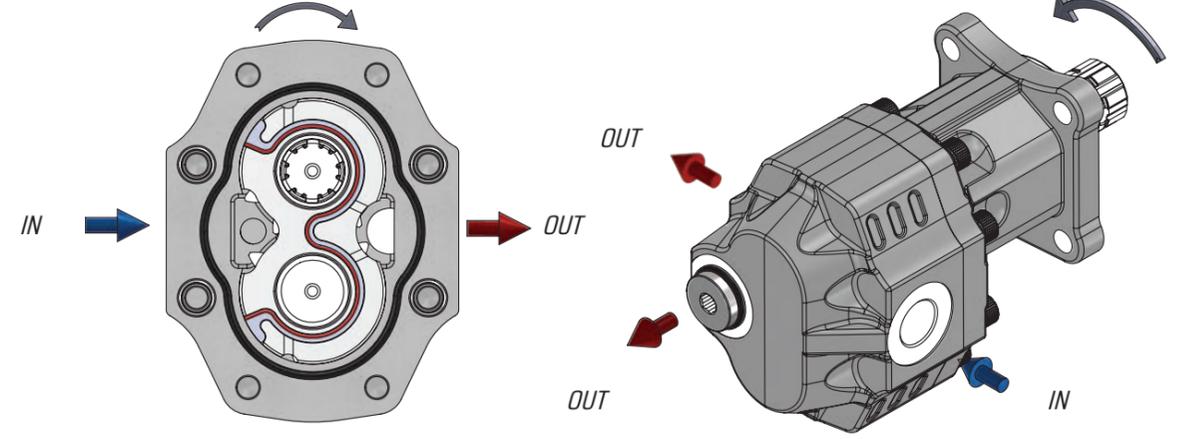



Sol Dönüşlü Pompa
Anticlockwise Rotation Pump

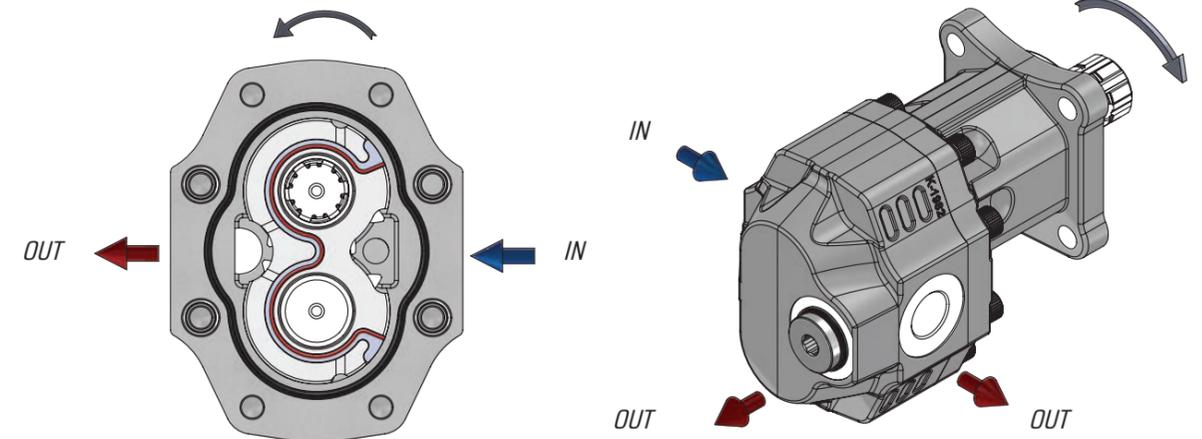




Çift Dönüşlü Pompa
Bi-Directional Pump

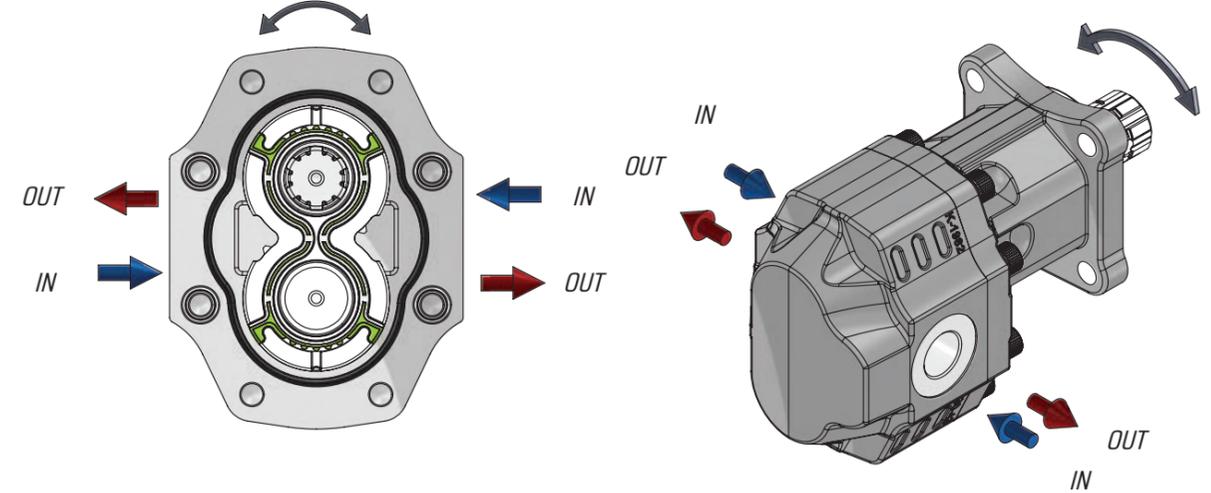




Çift Dönüştü Pompa
Bi-Directional Pump

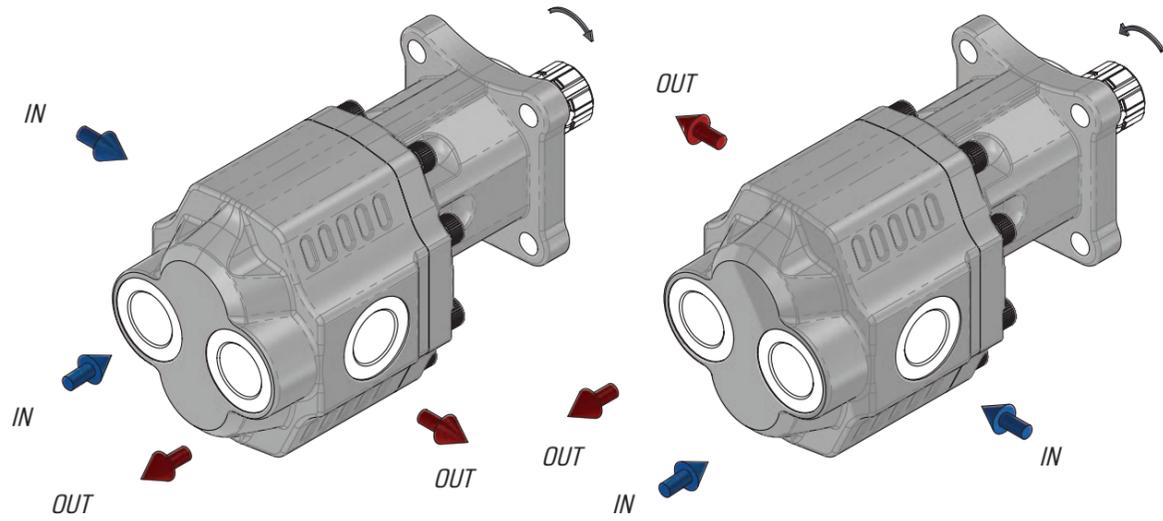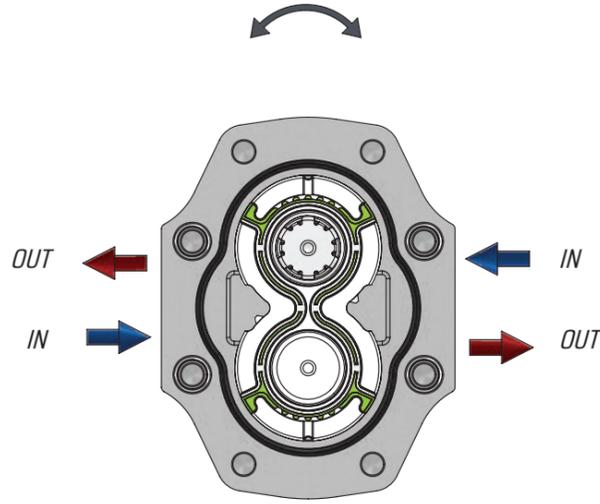




S

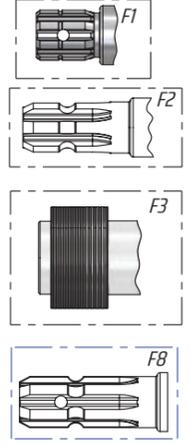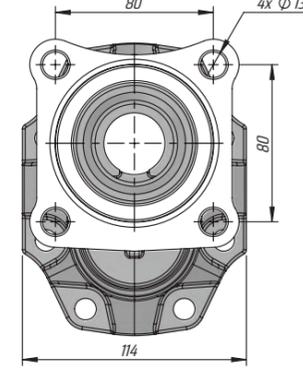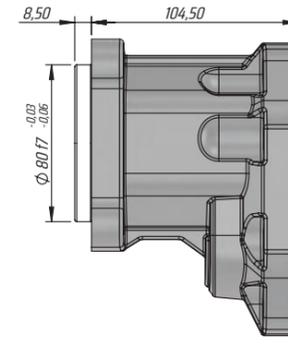

U









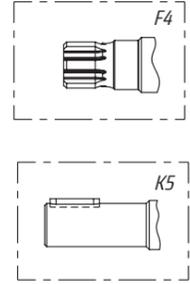
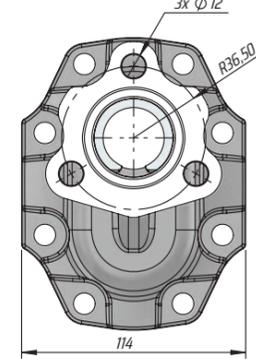
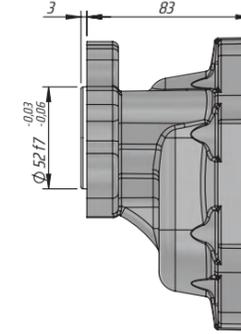







F

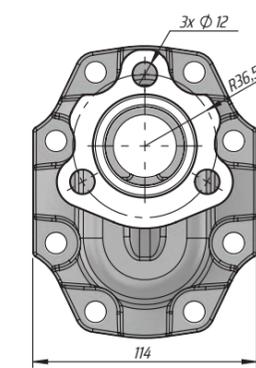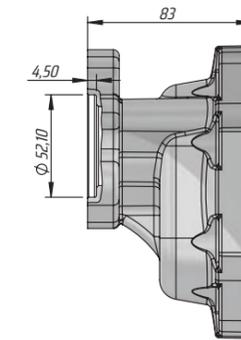

20 SERİSİ DİŞLİ POMPA
30 SERİSİ DİŞLİ POMPA
35 SERİSİ DİŞLİ POMPA
40 SERİSİ DİŞLİ POMPA
İŞ MAKİNE POMPALARI
PİSTONLU POMPALAR
GÜÇ AKTARMA GRUBU
VALFELER
ADAPTÖRLER
YAĞ TANKLARI
YEDEK PARÇALAR
TEKNİK VERİLER

20 SERİSİ DİŞLİ POMPA
30 SERİSİ DİŞLİ POMPA
35 SERİSİ DİŞLİ POMPA
40 SERİSİ DİŞLİ POMPA
İŞ MAKİNE POMPALARI
PİSTONLU POMPALAR
GÜÇ AKTARMA GRUBU
VALFELER
ADAPTÖRLER
YAĞ TANKLARI
YEDEK PARÇALAR
TEKNİK VERİLER

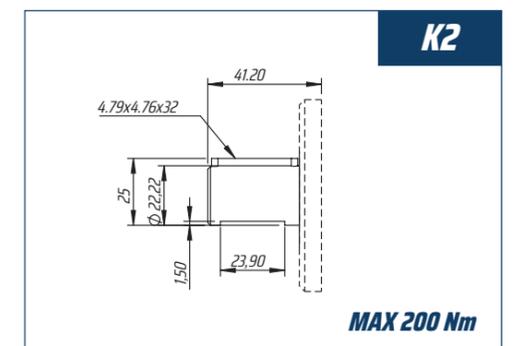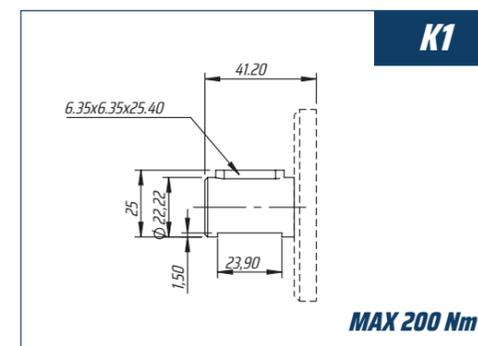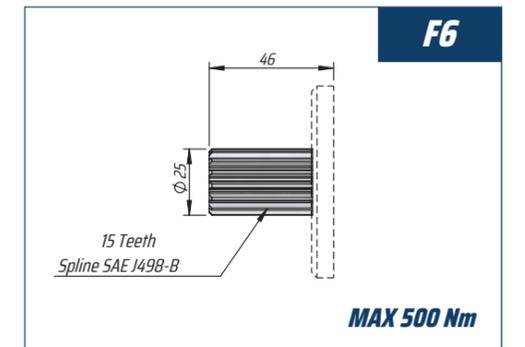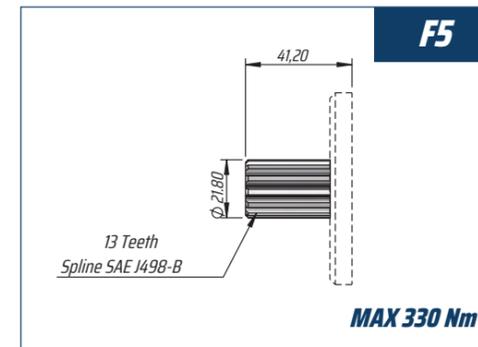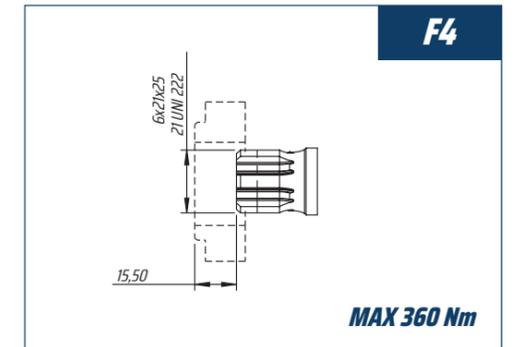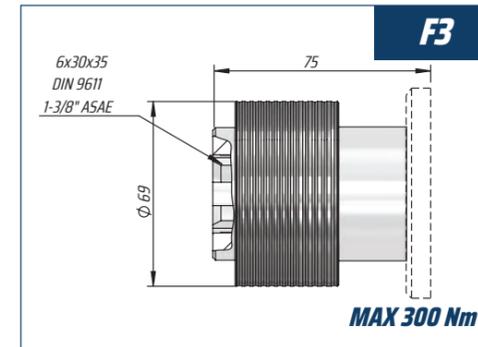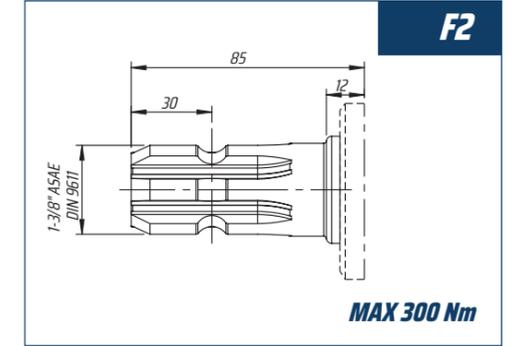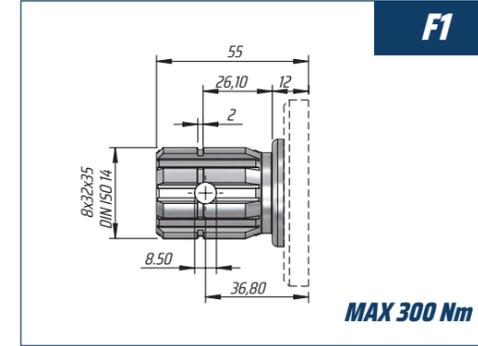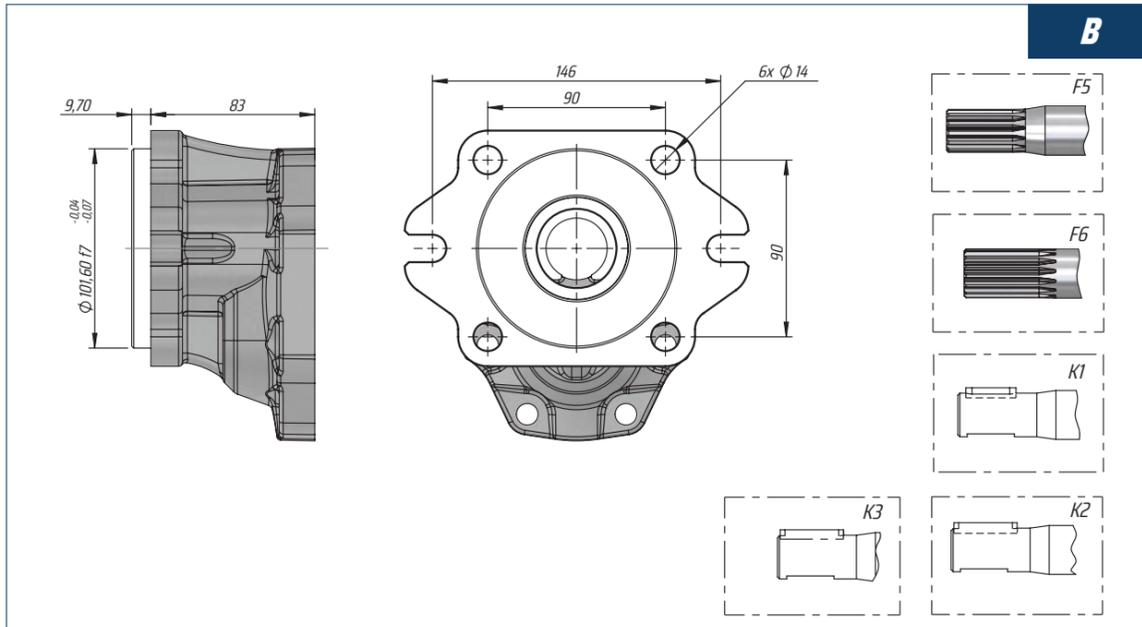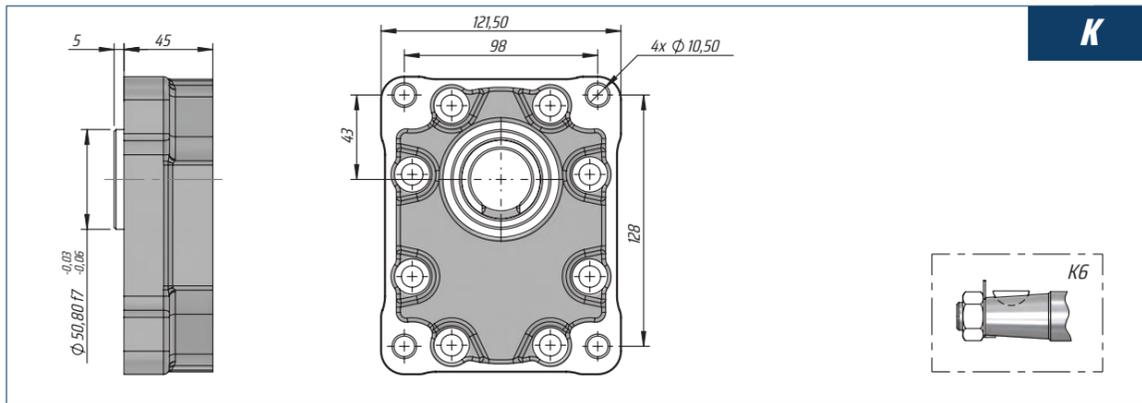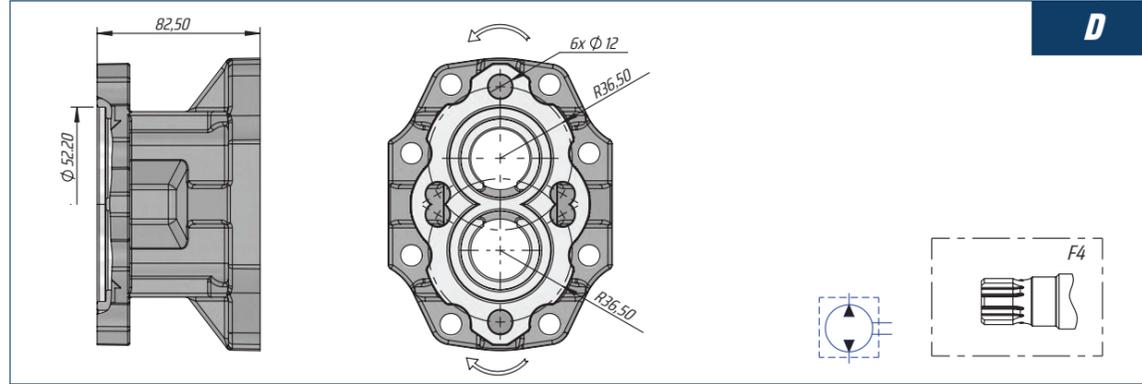

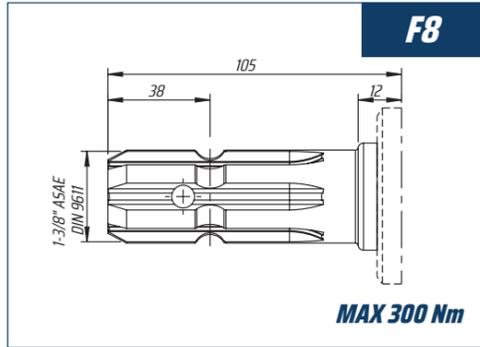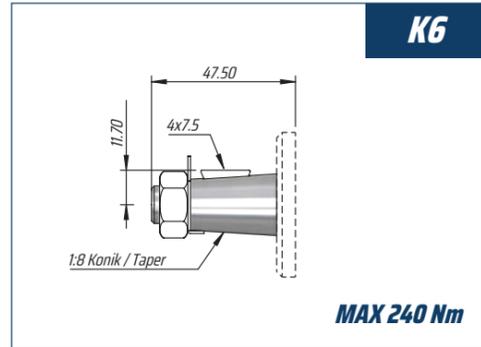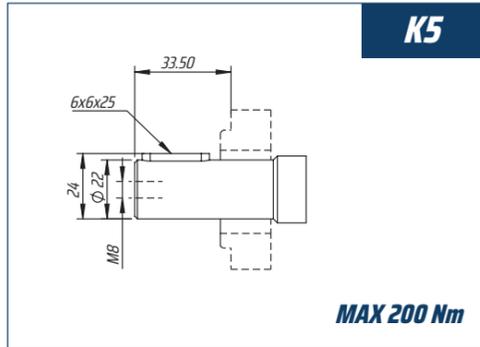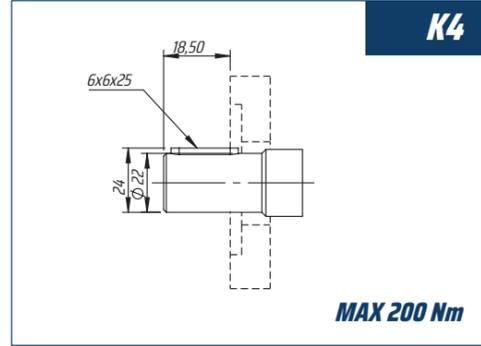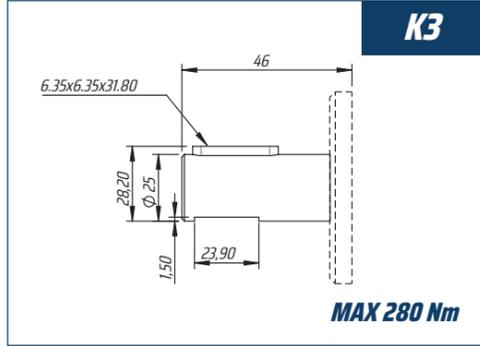

TEK YÖNLÜ RAKOR BAĞLANTILI DİŞLİ POMPA
SINGLE ROTATION GEAR PUMP WITH PIPE THREAD



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature			-15°C +100°C
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			


ÇİFT YÖNLÜ RAKOR BAĞLANTILI DİŞLİ POMPA
BI-DIRECTIONAL GEAR PUMP WITH PIPE THREAD



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature			-15°C +100°C
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			


TEK YÖNLÜ ADAPTÖR BAĞLANTILI DİŞLİ POMPA
SINGLE ROTATION GEAR PUMP WITH ADAPTER CONNECTION



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature			-15°C +100°C
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			


ÇİFT YÖNLÜ HİDROMOTOR RAKORLU
BI-DIRECTIONAL HYDROMOTOR PIPE THREAD



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature			-15°C +100°C
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			


TANDEM KODLAMA SİSTEMİ

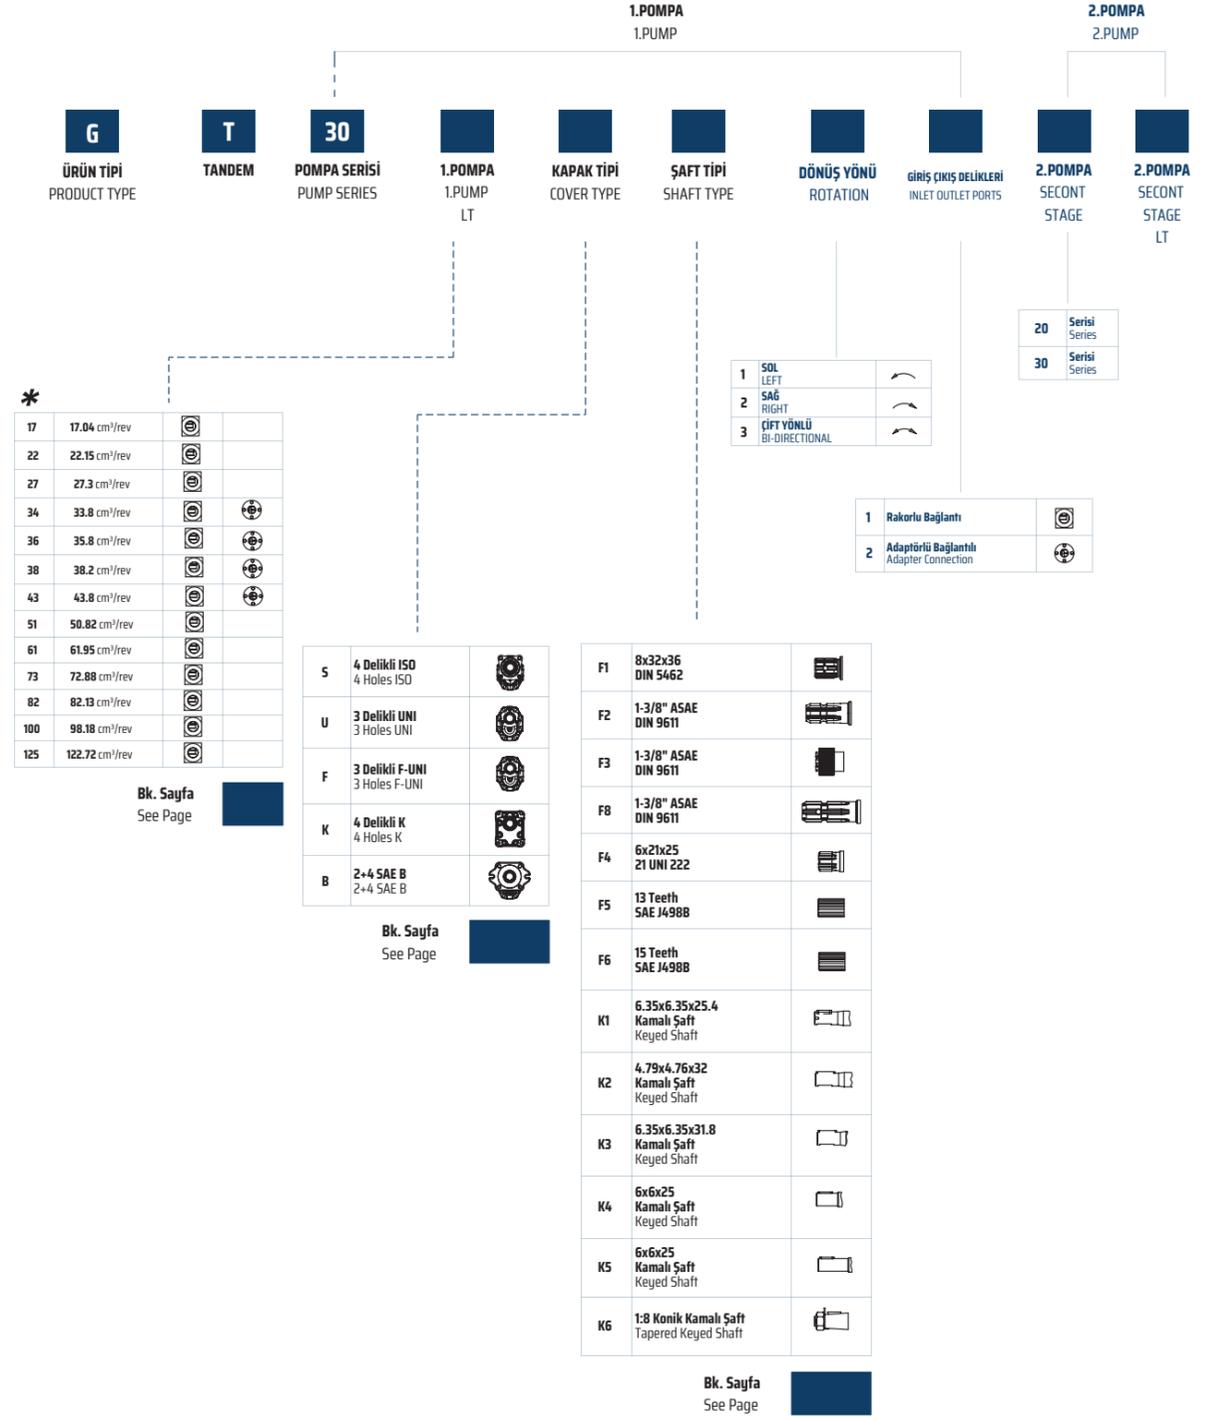

* Litrelere göre bağlantı tipleri tabloda gösterilmiştir.

* All liters are listed in tables as connection types


TEK YÖNLÜ ADAPTÖR BAĞLANTILI DİŞLİ POMPA
SINGLE ROTATION GEAR PUMP WITH ADAPTER CONNECTION



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature			-15°C +100°C
Oil filtering	> 200 bar: 10 µm < 200 bar: 25 µm				
Inlet pressure	-0,3 ÷ 2 bar				

ÇİFT YÖNLÜ HİDROMOTOR RAKORLU
BI-DIRECTIONAL HYDROMOTOR PIPE THREAD



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature			-15°C +100°C
Oil filtering	> 200 bar: 10 µm < 200 bar: 25 µm				
Inlet pressure	-0,3 ÷ 2 bar				


TEK VE ÇİFT YÖNLÜ RAKOR BAĞLANTILI TANDEM DİŞLİ POMPA
SINGLE & BI-DIRECTIONAL TANDEM GEAR PUMP WITH PIPE THREAD



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature			-15°C +100°C
Oil filtering	> 200 bar: 10 µm < 200 bar: 25 µm				
Inlet pressure	-0,3 ÷ 2 bar				

TEK VE ÇİFT YÖNLÜ ADAPTÖR BAĞLANTILI TANDEM DİŞLİ POMPA
SINGLE & BI-DIRECTIONAL TANDEM GEAR PUMP WITH ADAPTER CONNECTION



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature			-15°C +100°C
Oil filtering	> 200 bar: 10 µm < 200 bar: 25 µm				
Inlet pressure	-0,3 ÷ 2 bar				