




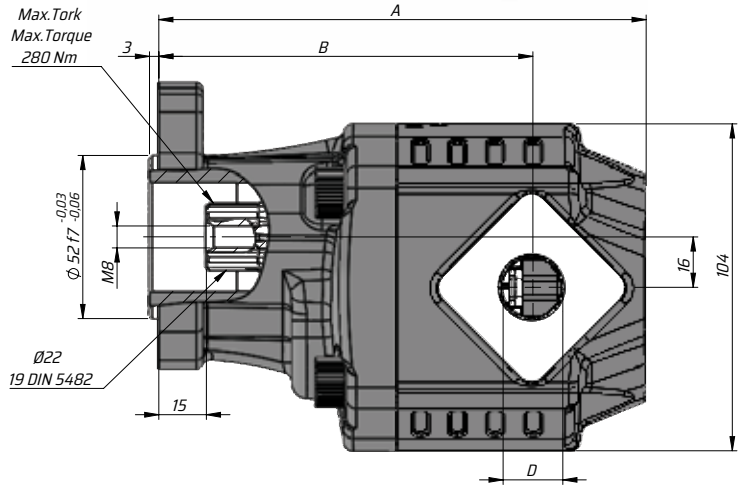

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10~10	10~35
	VG (cSt = mm ² /s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ~ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C ~ 100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		

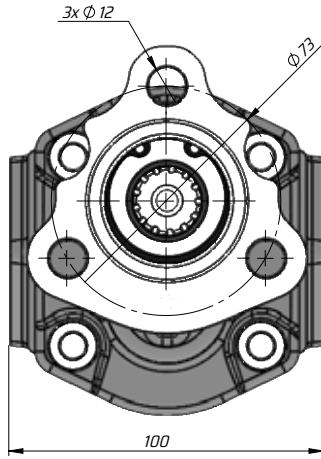

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol/Left	Sağ/Right	(cm ³ /rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(mm)	(mm)	C	C
G20006SF114	G20006SF124	6	280	310	325	2200	3000	127	96.5	G3/4"	G1/2"
G20010SF114	G20010SF124	10						133	102.5		
G20016SF114	G20016SF124	16						143	106.5		
G20020SF114	G20020SF124	20	260	280	290	2000	2800	149	113		
G20025SF114	G20025SF124	25	220	250	260			157	106		
G20032SF114	G20032SF124	32	190	210	220			168	116		
G20040SF114	G20040SF124	40	160	180	190	1800	2500	181	126		