


2+4 DELİKLİ SAE B 15 DİŞ TANDEM DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt - 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100		Working temperature -15°C + 100°C		
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 - 2 bar		

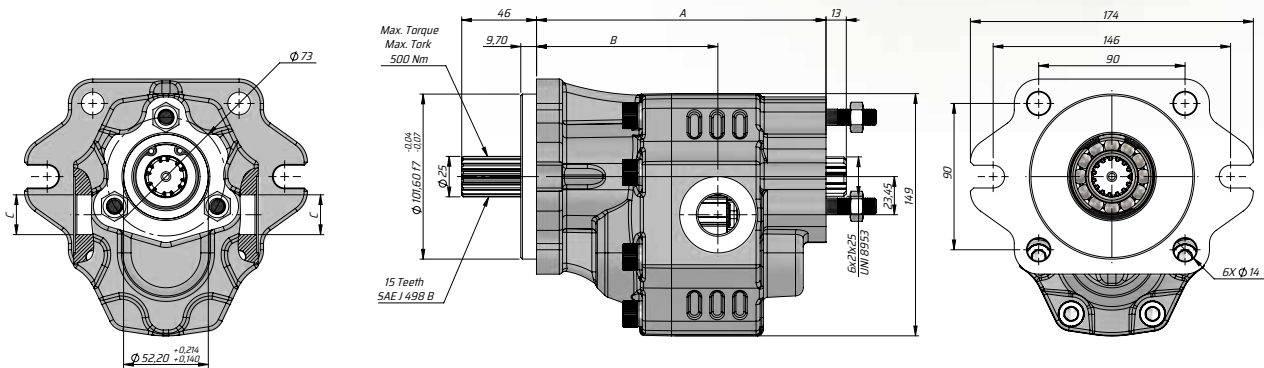

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Başınç Max. Intermittent Pressure	Maks. Anlık Başınç Max. Peak Pressure	Maks. Sürekli Hız Max. Contin- ous Speed	Maks. Aralıklı Hız Max. Intermit- tent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	Ç	Ç
GT30017BF631	17	290	315	325	2500	3000	300	161	102	G1/2"	G1/2"
GT30022BF631	22							165	104		
GT30027BF631	27							167	104		
GT30034BF631	34	280	300	310	2200	2800		172	106	G3/4"	G3/4"
GT30036BF631	36							172	106		
GT30038BF631	38							172	106		
GT30043BF631	43	270	290	300	2000	2500		178	111,5	G1"	G1"
GT30051BF631	51	240	260	280				183	113		
GT30061BF631	61	220	240	250	1800	2000		191	117		
GT30073BF631	73	200	220	230	1600	1800		196	119,5		
GT30082BF631	82	190	210	220	1500			202	124,5		
GT30100BF631	100	180	200	220				215	138,5		
GT30125BF631	125	160	180	200				231	142,5		