


6 DELİKLİ D-UNI ÇİFT YÖNLÜ DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ 100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			

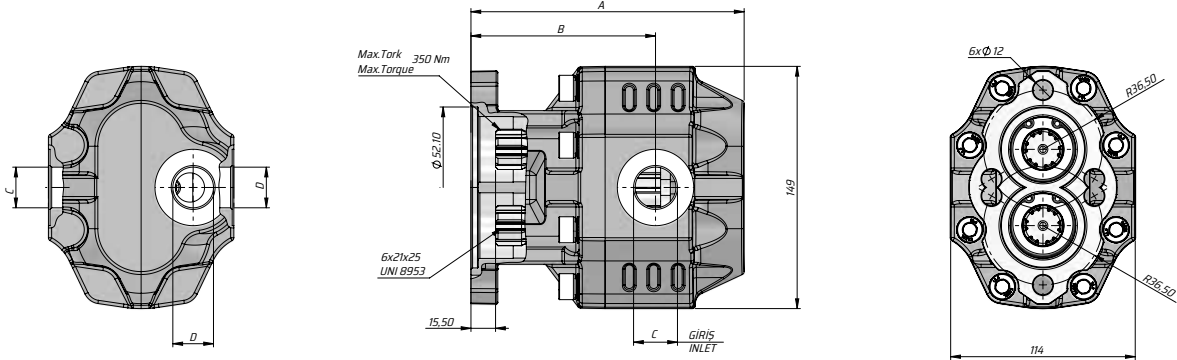

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet				
Sol/Left	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	Ç	D				
G300170F431	17	290	315	325	2500	3000	300	151	102.5	G1/2"	G1/2"				
G300220F431	22							155	104						
G300270F431	27							157	107.5						
G300340F431	34	280	300	310	2200	2800		162	108.5	G3/4"	G3/4"				
G300430F431	43	270	290	300	2000	2500		168	113.5						
G300510F431	51	240	260	280				173	113.5						
G300610F431	61	220	240	250	1900	2500		183	120	G1"	G1"				
G300730F431	73	205	225	230				186	122.5						
G300820F431	82							192	124						
G301000F431	100	180	200	220	1500	1800		205	138	G1 1/4"	G1 1/4"				
G301250F431	125	160	180	200				221	142						