

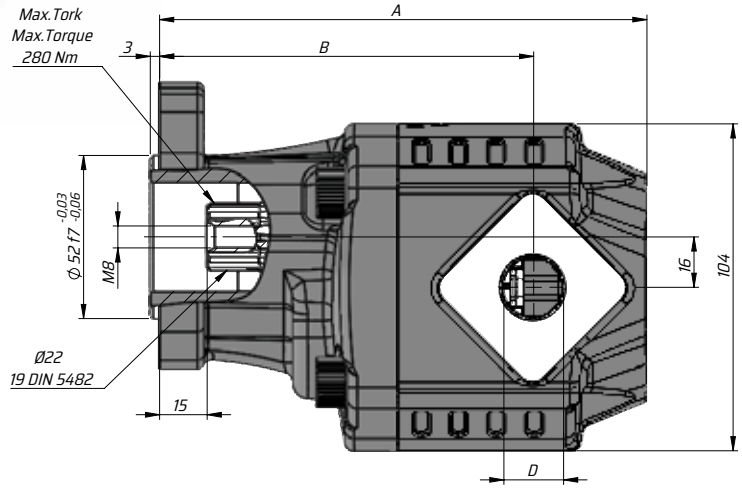


K 20 (WITH ADAPTER)

K 20 (ADAPTÖRLÜ)

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35
	VG (cSt = mm²/s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ +100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		

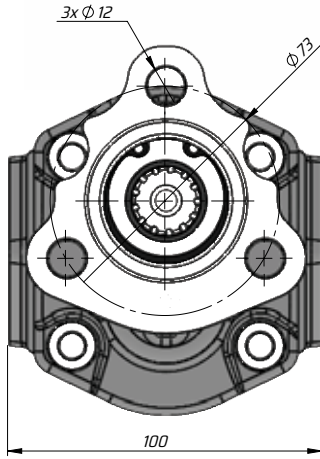

Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	C
G2006UF714	G2006UF724	6	280	310	325	2200	3000	300	133	102.5	G3/4"	G1/2"
G2010UF714	G2010UF724	10							139	108.5		
G2016UF714	G2016UF724	16							149	112.5		
G2020UF714	G2020UF724	20	260	280	290	2000	2800		155	119		
G2025UF714	G2025UF724	25	220	250	260				163	112		
G2032UF714	G2032UF724	32	190	210	220				174	122		
G2040UF714	G2040UF724	40	160	180	190	1800	2500		187	132		