




2+4 HOLES SAE B 13 TEETH BI-DIRECTIONAL GEAR PUMP

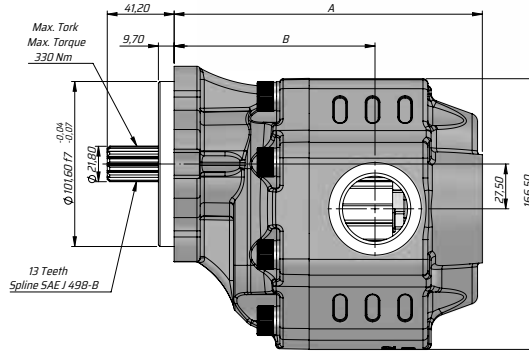

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10~10	10~35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ~ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C ~ 100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ~ 2 bar			

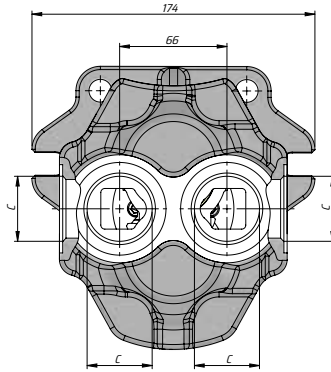

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol/Left	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	C
G35060BF536	60	250	270	290	1800	2700	300	176.5	117.5	G1"	G1 1/4"
G35073BF536	73	245	265	285				182.5	116.5		
G35082BF536	82	240	260	280				185.5	119.5		
G35090BF536	90	230	250	265				188.5	123.5		
G35100BF536	100	220	240	255				199.5	124		
G35110BF536	110	205	225	240	204.5	126					
G35120BF536	120	195	215	230	1500	2500		211	126		