

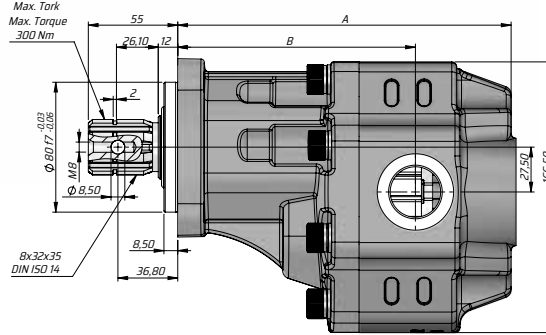


4 DELİKLİ ISO ÇİFT YÖNLÜ DİŞLİ MOTOR


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ~ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 - 2 bar			

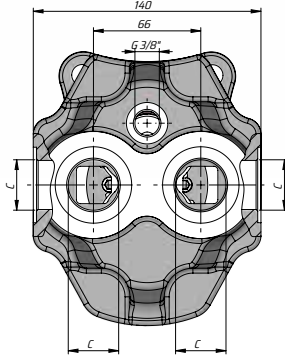

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol/Left	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	C
GM350605F131	60	250	270	290	1800	2700	300	205	146	G1"	G1 1/4"
GM350735F131	73	245	265	285				211	145		
GM350825F131	82	240	260	280				214	148		
GM350905F131	90	230	250	265				217	152		
GM351005F131	100	220	240	255				228	152.5		
GM351105F131	110	205	225	240	1500	2500	233	154.5	G1 1/4"	G1 1/4"	
GM351205F131	120	195	215	230			239.5	154.5			