

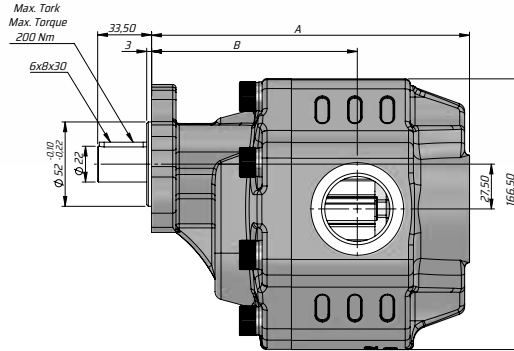


3 DELİKLİ KAMALI UNI ÇİFT YÖNLÜ DİŞLİ MOTOR


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature		-15°C ÷ +100°C	
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0.3 ÷ 2 bar		

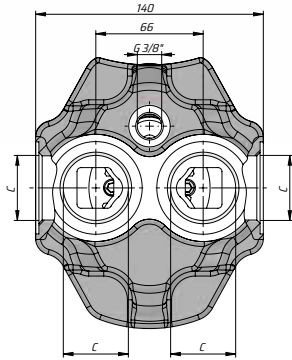

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol/Left	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	C
GM35060UK931	60	250	270	290	1800	2700	300	179.5	120.5	G1"	G1 1/4"
GM35073UK931	73	245	265	285				185.5	119.5		
GM35082UK931	82	240	260	280				188.5	122.5		
GM35090UK931	90	230	250	265				191.5	126.5		
GM35100UK931	100	220	240	255				202.5	127		
GM35110UK931	110	205	225	240	1500	2500	300	207.5	129		
GM35120UK931	120	195	215	230				214	129		