

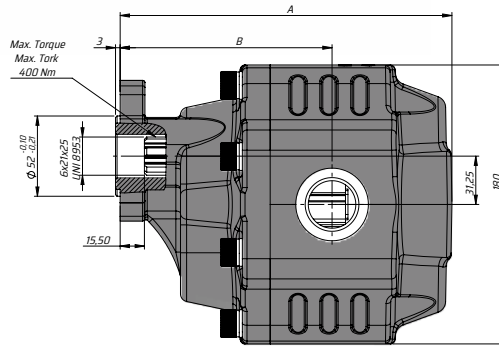


3 DELİKLİ UNI ÇİFT YÖNLÜ DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt - 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 - 2 bar			

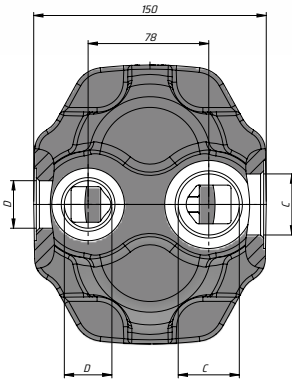

A-B ölçüleri teknik çizimdekiyle aynı idi değişiklik yapılmadı

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol / Left	Sağ /Right	(cm ³ /rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(mm)	(mm)	C	D
G40063UF415	G40063UF425	63	290	315	325	1800	2700	209.5	139	G1"	G3/4"
G40073UF415	G40073UF425	73	280	300	315			213.5	139		
G40087UF415	G40087UF425	87	260	280	290			218.5	144	G1 1/4"	G1"
G40109UF415	G40109UF425	109	250	270	280			226.5	149		
G40116UF415	G40116UF425	116	240	260	270	1500	2500	226.5	149	G1 1/4"	G1"
G40133UF415	G40133UF425	133	220	250	260			235.5	150		
G40151UF415	G40151UF425	151	180	210	220			241.5	153	G1 1/2"	G1"