

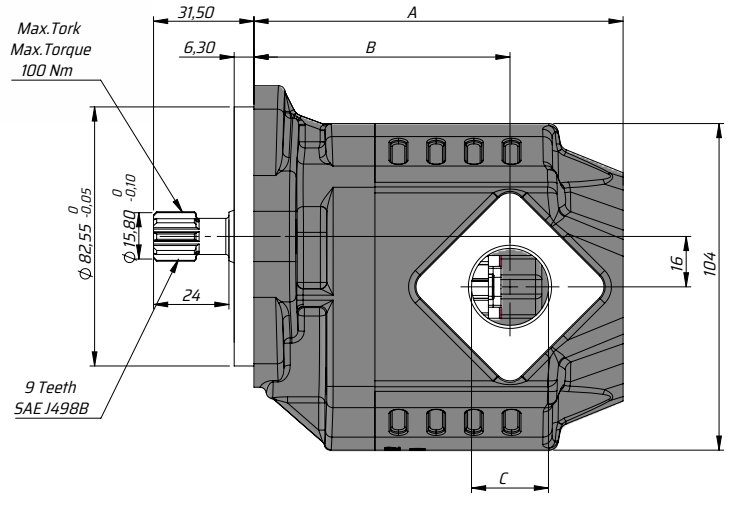


8-SAE A TEKYÖNLÜ GÖVDE (RAKORLU-F12)

8-SAE A TEKYÖNLÜ GÖVDE (RAKORLU-F12)

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35
	VG (cSt = mm²/s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		

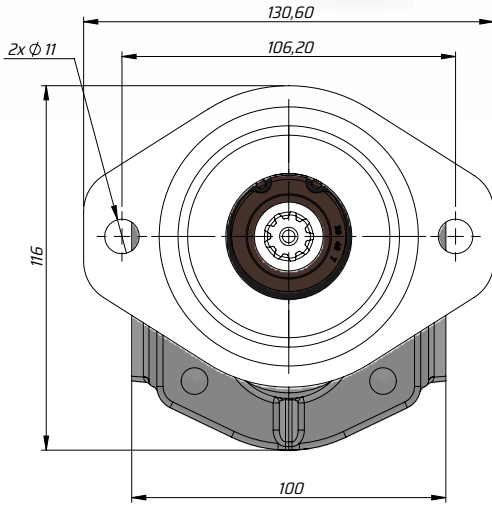

Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	D
G2006AF1212	G2006AF1222	6	280	310	325	2200	3000	300	95,5	65	G3/4"	G1/2"
G2010AF1212	G2010AF1222	10							101,5	71		
G2016AF1212	G2016AF1222	16							111,5	75		
G2020AF1212	G2020AF1222	20	260	280	290				117,5	81,5		
G2025AF1212	G2025AF1222	25	220	250	260				125,5	74,5		
G2032AF1212	G2032AF1222	32	190	210	220	2000	2800	2500	136,5	84,5	G3/4"	G1/2"
G2040AF1212	G2040AF1222	40	160	180	190	1800	2500		149,5	94,5		