

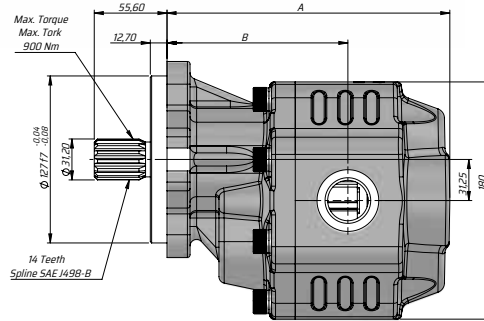


2+4 DELİKLİ SAE C 14 DİŞ ÇİFT YÖNLÜ DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 - 2 bar			

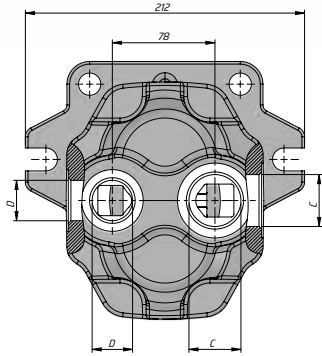

Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol / Left	Sağ / Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	D
G40063CF1015	G40063CF1025	63	290	315	325	1800	2700	300	198	127.5	G1"	G3/4"
G40073CF1015	G40073CF1025	73	280	300	315				202	127.5		
G40087CF1015	G40087CF1025	87	260	280	290				207	133	G1 1/4"	G1"
G40109CF1015	G40109CF1025	109	250	270	280				215	137.5		
G40116CF1015	G40116CF1025	116	240	260	270	1500	2500	300	215	137.5	G1 1/2"	G1"
G40133CF1015	G40133CF1025	133	220	250	260				224	138.5		
G40151CF1015	G40151CF1025	151	180	210	220				230	141	G1 1/2"	G1"