


4 DELİKLİ SAE C 16 DİŞ ÇİFT YÖNLÜ DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt + 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature		-15°C +100°C	
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 + 2 bar		

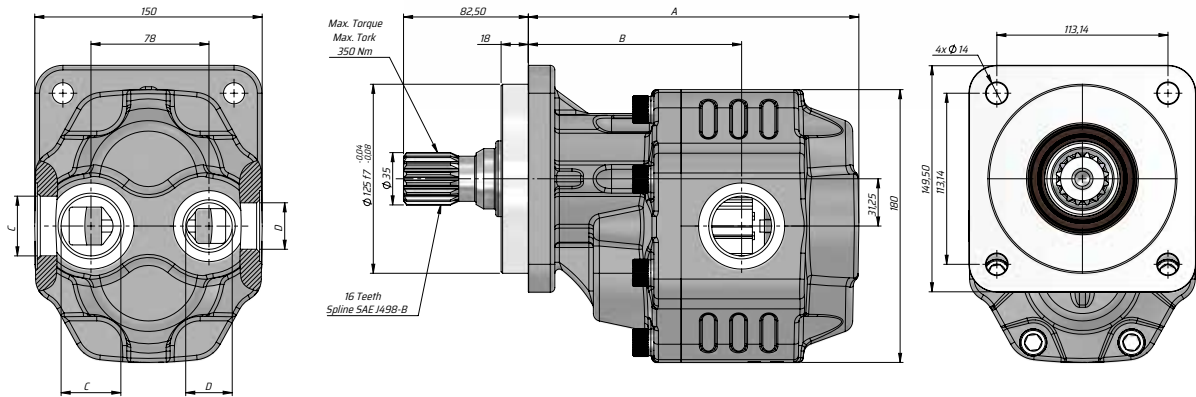

Kod Code		İletim hacmi Displace- ment	Max. Sürekli Basıncı Max. Continu- ous pressure	Maks. Aralıklı Başınç Max. Intermit- tent Pressure	Maks. Anlık Başınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol / Left	Sağ /Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	Ç	D
G40063RF915	G40063RF925	63	290	315	325	1800	2700	300	201,5	131	G1"	G3/4"
G40073RF915	G40073RF925	73	280	300	315				205,5	131		
G40087RF915	G40087RF925	87	260	280	290				210,5	136	G1 1/4"	G1"
G40109RF915	G40109RF925	109	250	270	280	218,5	141					
G40116RF915	G40116RF925	116	240	260	270	1500	2500	300	218,5	141	G1 1/2"	G1"
G40133RF915	G40133RF925	133	220	250	260				227,5	142		
G40151RF915	G40151RF925	151	180	210	220				233,5	144,5		