


2+4 DELİKLİ SAE C 14 DİŞ ÇİFT YÖNLÜ DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35
	VG (cSt = mm ² /s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		

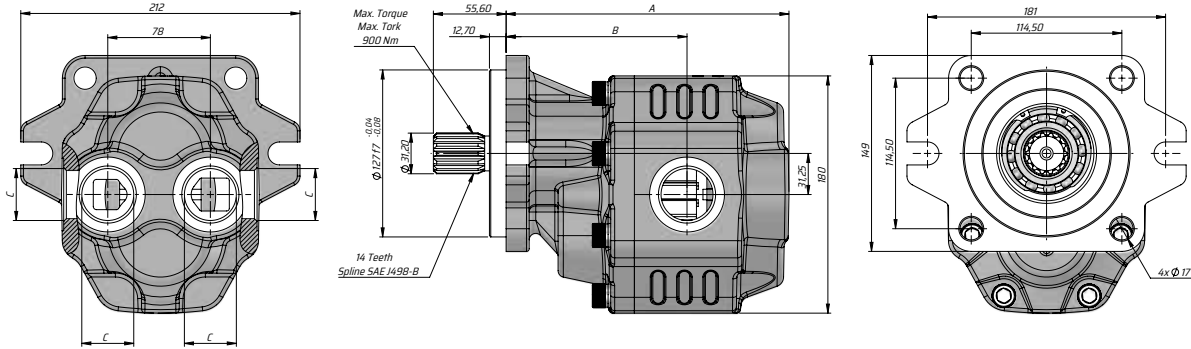

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm ³ /rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	C
G40063CF1035	63	290	315	325	1800	2700	300	198	127.5	G1"	G1 1/4"
G40073CF1035	73	280	300	315				202	127.5		
G40087CF1035	87	260	280	290				207	133		
G40109CF1035	109	250	270	280				215	137.5		
G40116CF1035	116	240	260	270	1500	2500		215	137.5		
G40133CF1035	133	220	250	260				224	138.5		
G40151CF1035	151	180	210	220				230	141		