


2+4 DELİKLİ SAE C KAMALI DİŞLİ MOTOR



HİDROLİK SEMBOL
HYDRAULIC SYMBOL



Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ~ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 - 2 bar			

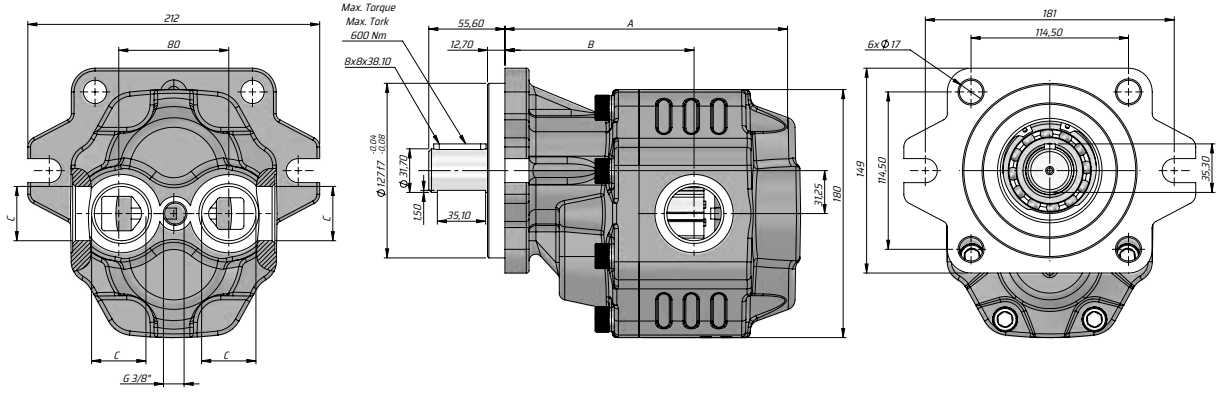

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm ³ /rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	C
GM40063CK1135	63	290	315	325	1800	2700	300	188.5	127.5	G1"	
GM40073CK1135	73	280	300	315				192.5	127.5		
GM40087CK1135	87	260	280	290				197.5	131.5		
GM40109CK1135	109	250	270	280	1500	2500	300	205.5	137.5	G1 1/4"	
GM40116CK1135	116	240	260	270				205.5	137.5		
GM40133CK1135	133	220	250	260				214.5	138.5		
GM40151CK1135	155	180	210	220				220.5	141		