


## 3 DELİKLİ UNI TANDEM DİŞLİ POMPA



HİDROLİK SEMBOL  
HYDRAULIC SYMBOL

|                                                   |                                                                                |                                      |        |       |      |
|---------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------|--------|-------|------|
| Fluid                                             | Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon |                                      |        |       |      |
| Kinematic viscosity suggested                     | Average ambient temp. (°C)                                                     | < -10                                | -10~10 | 10~35 | > 35 |
|                                                   | VG (cSt = mm²/s)                                                               | 22                                   | 32     | 46    | 68   |
| Optimale kinematic viscosity                      |                                                                                | VG= 10 cSt ÷ 100 cSt                 |        |       |      |
| Max kinematic viscosity suggested at the start-up |                                                                                | VG= 750 cSt                          |        |       |      |
| Viscosity index suggested                         | VI > 100                                                                       | Working temperature -15°C ÷ 100°C    |        |       |      |
| Oil filtering                                     |                                                                                | > 200 bar: 10 µm<br>< 200 bar: 25 µm |        |       |      |
| Inlet pressure                                    |                                                                                | -0,3 ÷ 2 bar                         |        |       |      |

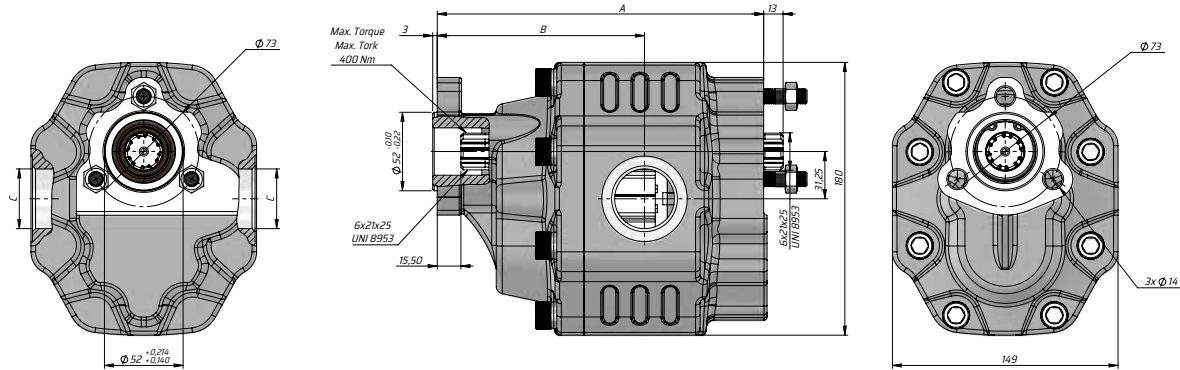

| Kod<br>Code  | İletim<br>hacmi<br>Displace-<br>ment | Max. Sürekli<br>Basıncı<br>Max. Continuous<br>pressure | Maks. Aralıklı<br>Basıncı<br>Max. Intermittent<br>Pressure | Maks. Anlık<br>Basıncı<br>Max. Peak<br>Pressure | Maks.<br>Sürekli Hız<br>Max. Continu-<br>ous Speed | Maks. Aralıklı<br>Hız<br>Max. Intermit-<br>tent Speed | Min.<br>Hız<br>Min.<br>Speed | A    | B     | Giriş<br>Inlet | Çıkış<br>Outlet |
|--------------|--------------------------------------|--------------------------------------------------------|------------------------------------------------------------|-------------------------------------------------|----------------------------------------------------|-------------------------------------------------------|------------------------------|------|-------|----------------|-----------------|
| BD           | (cm³/rev)                            | (100%)(BAR)                                            | (20 sec.max)(BAR)                                          | (6 sec.max)(BAR)                                | (RPM)                                              | (RPM)                                                 | (RPM)                        | (mm) | (mm)  | C              | C               |
| GT40063UF431 | 63                                   | 290                                                    | 315                                                        | 325                                             | 1800                                               | 2700                                                  | 300                          | 199  | 127   | G1"            |                 |
| GT40073UF431 | 73                                   | 280                                                    | 300                                                        | 315                                             |                                                    |                                                       |                              | 203  | 127   |                |                 |
| GT40087UF431 | 87                                   | 260                                                    | 280                                                        | 290                                             |                                                    |                                                       |                              | 208  | 131   |                |                 |
| GT40109UF431 | 109                                  | 250                                                    | 270                                                        | 280                                             |                                                    |                                                       |                              | 216  | 137   | G1 1/4"        |                 |
| GT40133UF431 | 133                                  | 220                                                    | 250                                                        | 260                                             | 1500                                               | 2500                                                  |                              | 225  | 138   |                |                 |
| GT40151UF431 | 151                                  | 180                                                    | 210                                                        | 220                                             |                                                    |                                                       |                              | 231  | 140.5 |                |                 |