


4 DELİKLİ ASAE-S TANDEM DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			

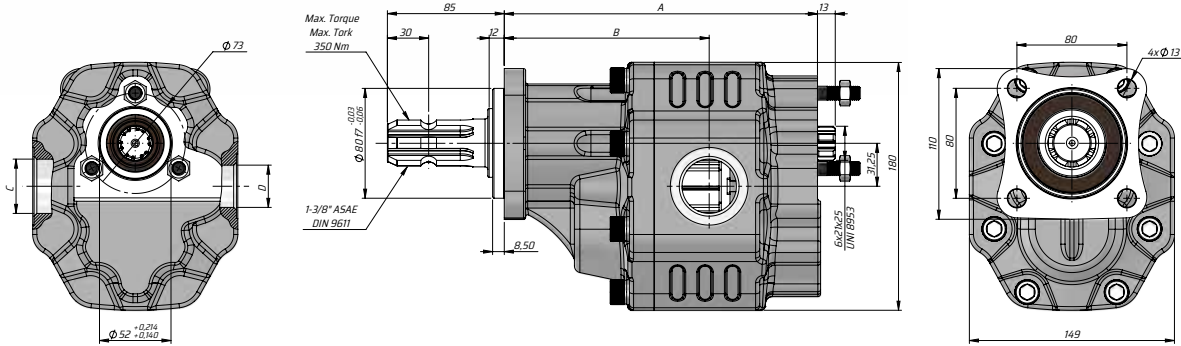

Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet	
Sol / Left	Sağ / Right	(cm³/rev)	(100%) (BAR)	(20 sec.max) (BAR)	(6 sec.max) (BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	Ç	D	
GT40063SF211	GT40063SF221	63	290	315	325	1800	2700	300	211	139	G1"	G3/4"	
GT40073SF211	GT40073SF221	73	280	300	315				215	139	G1 1/4"	G1"	
GT40087SF211	GT40087SF221	87	260	280	290				220	143			
GT40109SF211	GT40109SF221	109	250	270	280				228	149	G1 1/2"		
GT40133SF211	GT40133SF221	133	220	250	260	1500	2500		237	150			
GT40151SF211	GT40151SF221	151	180	210	220				243	152.5			