


4 DELİKLİ ASAE-L TANDEM DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt + 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature		-15°C +100°C	
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 + 2 bar		

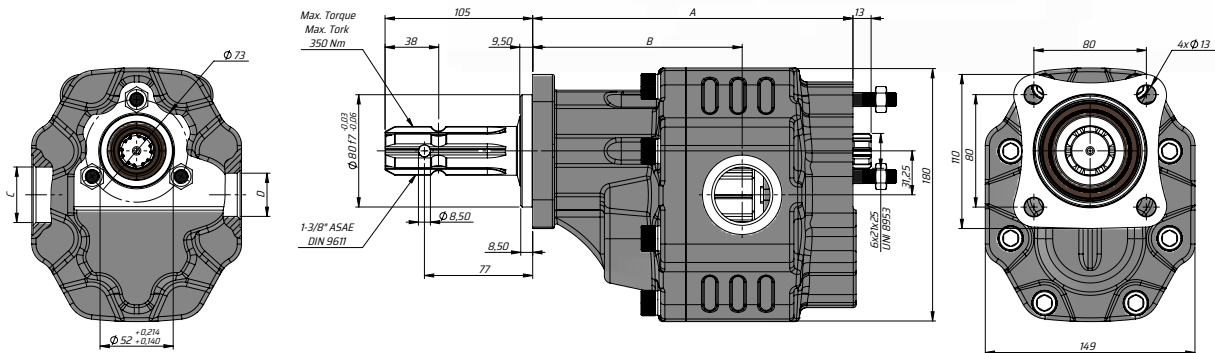

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous Pressure	Hız Aralığı-Speed Range		A	B	Giriş Inlet	Çıkış Outlet
			(Dev/Dak) -(Rev / Min)					
BD	(cm³/rev)	(BAR)	Min.	Max. Continuous	(mm)	(mm)	Ç	Ç
GT400635F831	63	280	300	1800	211	139	G1"	
GT400735F831	73	275			215	139		
GT400875F831	87	265			220	143	G1 1/4"	
GT401095F831	109	240			228	149		
GT401335F831	133	230		1500	237	150		
GT401515F831	155	180			243	152.5		