


4 DELİKLİ ISO DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt - 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature		-15°C -100°C	
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 - 2 bar		

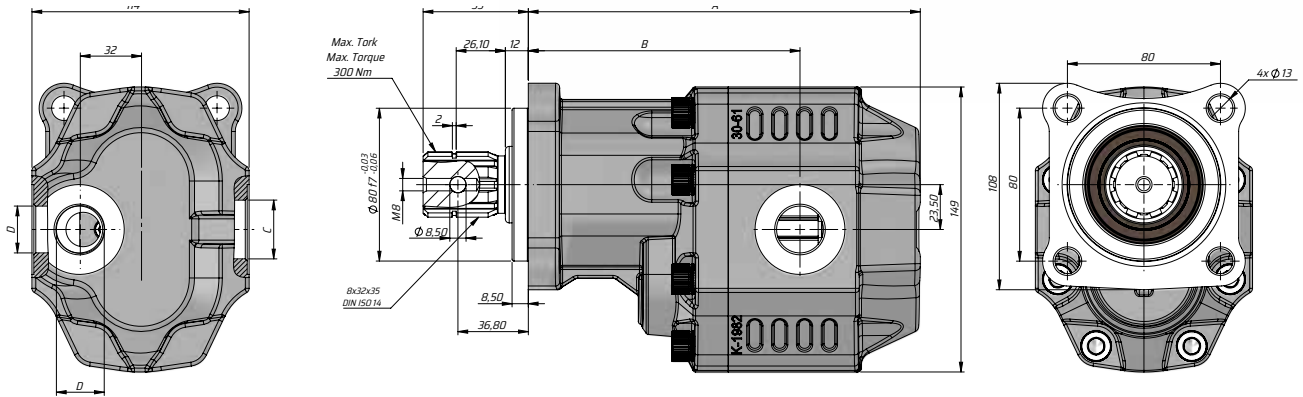

Kod Code		İletim hacmi Displacement	Max. Sürekli Basınç Max. Continuous pressure	Maks. Aralıklı Basınç Max. Intermittent Pressure	Maks. Anlık Basınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	Ç	D
G300175F11	G300175F121	17	290	315	325	2500	3000	300	173	124.5	G1/2"	G1/2"
G300225F11	G300225F121	22							177	126	G3/4"	
G300275F11	G300275F121	27							179	129.5		
G300345F11	G300345F121	34	280	300	310	2200	2800		184	130.5	G1"	G3/4"
G300435F11	G300435F121	43	270	290	300	2000	2500		190	135.5		
G300515F11	G300515F121	51	240	260	280				195	135.5		
G300615F11	G300615F121	61	220	240	250	205			142	G1 1/4"		
G300735F11	G300735F121	73	205	225	230	1900			208		144.5	
G300825F11	G300825F121	82					214		146	G1 1/4"	G1" G3/4" (Alternative)	
G301005F11	G301005F121	100	180	200	220	1500	1800		227			160
G301255F11	G301255F121	125	160	180	200			243	164			