


3 DELİKLİ UNI TANDEM DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35
	VG (cSt = mm²/s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		

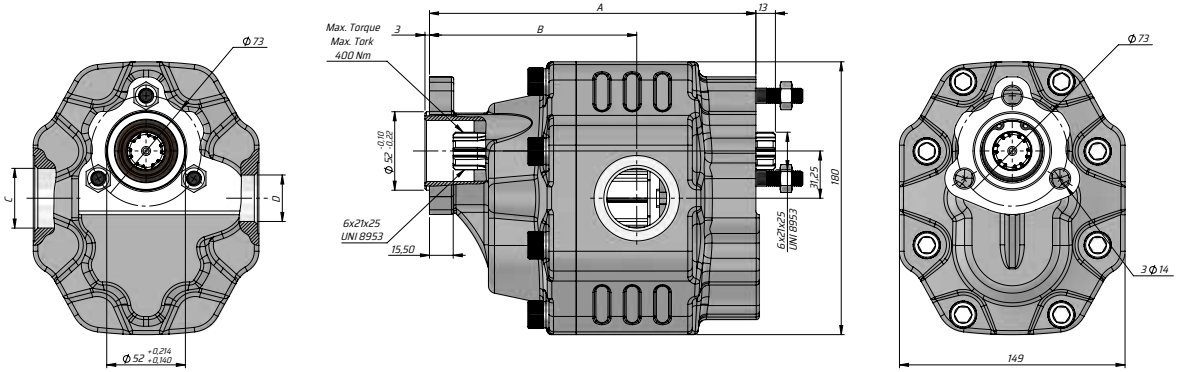

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol / Left	Sağ / Right	(cm³/rev)	(100%) (BAR)	(20 sec.max) (BAR)	(6 sec.max) (BAR)	(RPM)	(RPM)	(mm)	(mm)	C	D
GT40063UF411	GT40063UF421	63	290	315	325	1800	2700	211	139	G1"	G3/4"
GT40073UF411	GT40073UF421	73	280	300	315			215	139		
GT40087UF411	GT40087UF421	87	260	280	290			220	143		
GT40109UF411	GT40109UF421	109	250	270	280			228	149		
GT40133UF411	GT40133UF421	133	220	250	260	1500	2500	237	150	G1 1/2"	G1"
GT40151UF411	GT40151UF421	151	180	210	220			243	152.5		