






ÇİFT YÖNLÜ MEKANİK VALFLİ DİŞLİ POMPA

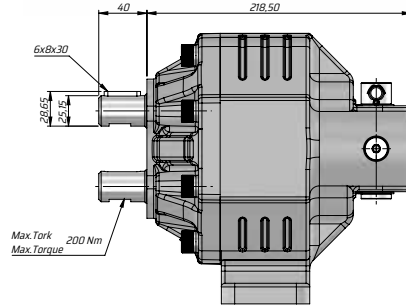

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	Giriş Inlet	Çıkış Outlet
Sağ /Right	(cm ³ /rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	C	D
G40109VK73MVA	108.90	250	270	280	1800	2700	300	G1 1/4"	G1"