



2 HOLES SAE A UNIDIRECTIONAL GEAR PUMP
2 DELİKLİ SAE A TEK YÖNLÜ DİŞLİ POMPA

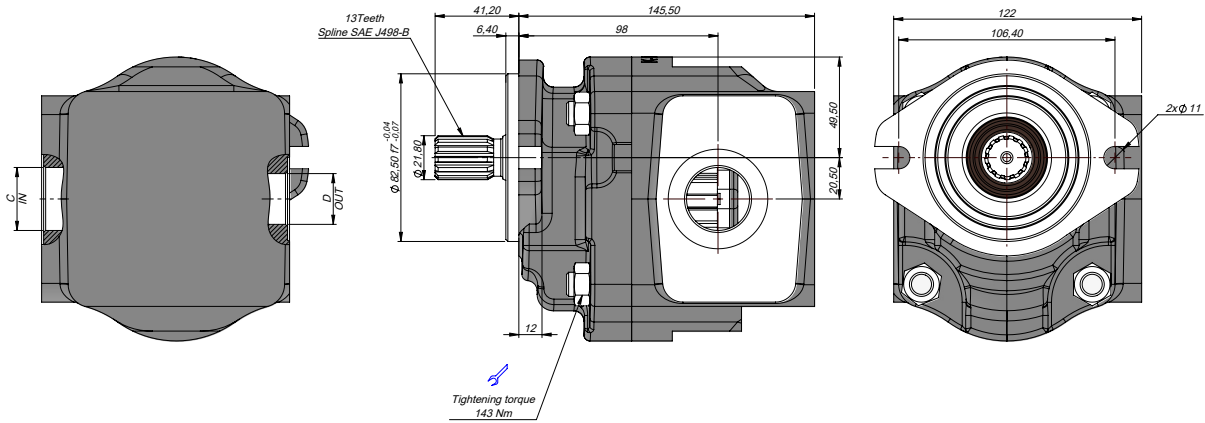

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature		-15°C +100°C	
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 - 2 bar		

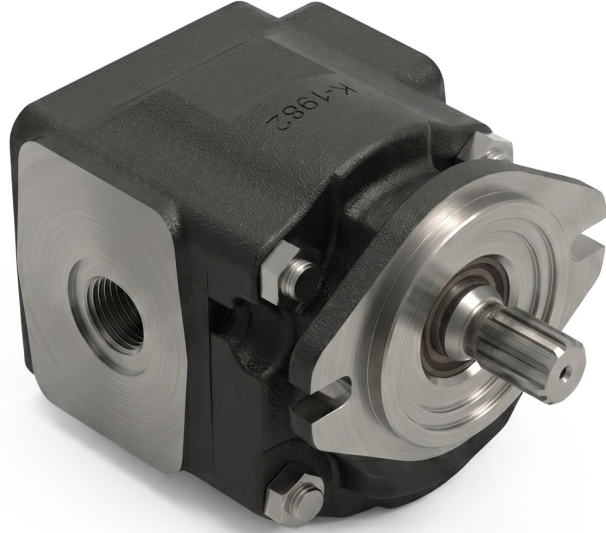

Kod Code		İletim Hacmi Displacement	Maks. Sürekli Basınç Max. Continuous Pressure	Hız Aralığı Speed Range		Giriş Inlet	Çıkış Outlet
				(Dev/Dak) (Rev / Min)			
Sol/Left	Sağ/Right	(cm³/rev)	(BAR)	Min.	Max. Continuous	Ç	D
G16031AF511	G16031AF521	32	275	500	3500	G1 1/2"	G3/4"