
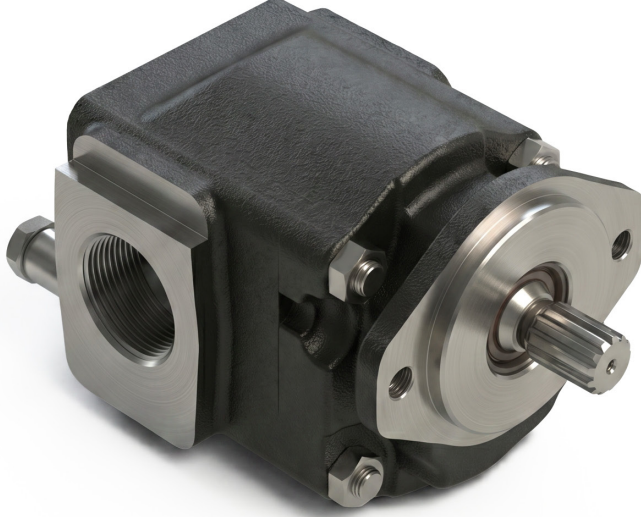


2 HOLES SAE A UNIDIRECTIONAL GEAR PUMP

2 DELİKLİ SAE A TEK YÖNLÜ DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ 100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			

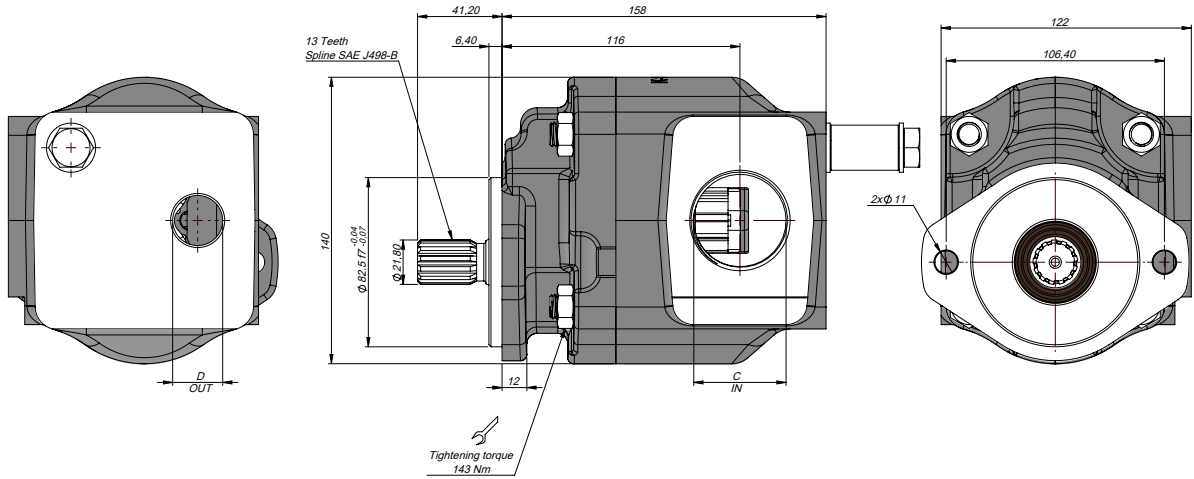

Kod Code		İletim Hacmi Displacement (cm³/rev)	Maks. Sürekli Basınç Max. Continuous Pressure (BAR)	Hız Aralığı Speed Range (Dev/Dak) (Rev / Min)		Giriş Inlet	Çıkış Outlet
Sol/Left	Sağ/Right			Min.	Max. Continuous		
G16044AF511	G16044AF521	44	220	500	3000	G1 1/2"	G3/4"