

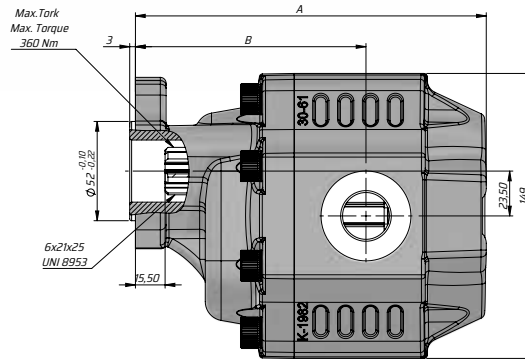


3 DELİKLİ UNI DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ 100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			

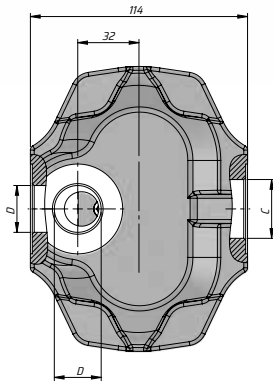

Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	D
G30017UF411	G30017UF421	17	290	315	325	2500	3000	300	151.5	103	G1/2"	G1/2"
G30022UF411	G30022UF421	22							155.5	104.5	G3/4"	
G30027UF411	G30027UF421	27							157.5	108		
G30034UF411	G30034UF421	34	280	300	310	2200	2800		162.5	109	G1"	G3/4"
G30043UF411	G30043UF421	43	270	290	300	2000	168.5		114			
G30051UF411	G30051UF421	51	240	260	280		173.5		114			
G30061UF411	G30061UF421	61	220	240	250	1900	2500		183.5	120.5	G1 1/4"	G1" G3/4" (Alternative)
G30073UF411	G30073UF421	73	205	225	230				186.5	123		
G30082UF411	G30082UF421	82							192.5	124.5		
G30100UF411	G30100UF421	100	180	200	220	1500	1800		205.5	138.5	G1 1/4"	
G30125UF411	G30125UF421	125	160	180	200				221.5	142.5		