


## TEK YÖNLÜ TANDEM DİŞLİ POMPA



HİDROLİK SEMBOL  
HYDRAULIC SYMBOL

|                                                   |                                                                                |                                      |        |       |
|---------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------|--------|-------|
| Fluid                                             | Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon |                                      |        |       |
| Kinematic viscosity suggested                     | Average ambient temp. (°C)                                                     | < -10                                | -10-10 | 10-35 |
|                                                   | VG (cSt = mm²/s)                                                               | 22                                   | 32     | 46    |
| Optimale kinematic viscosity                      |                                                                                | VG= 10 cSt ÷ 100 cSt                 |        |       |
| Max kinematic viscosity suggested at the start-up |                                                                                | VG= 750 cSt                          |        |       |
| Viscosity index suggested                         | VI > 100                                                                       | Working temperature                  |        |       |
| Oil filtering                                     |                                                                                | > 200 bar: 10 µm<br>< 200 bar: 25 µm |        |       |
| Inlet pressure                                    |                                                                                | -0,3 ÷ 2 bar                         |        |       |

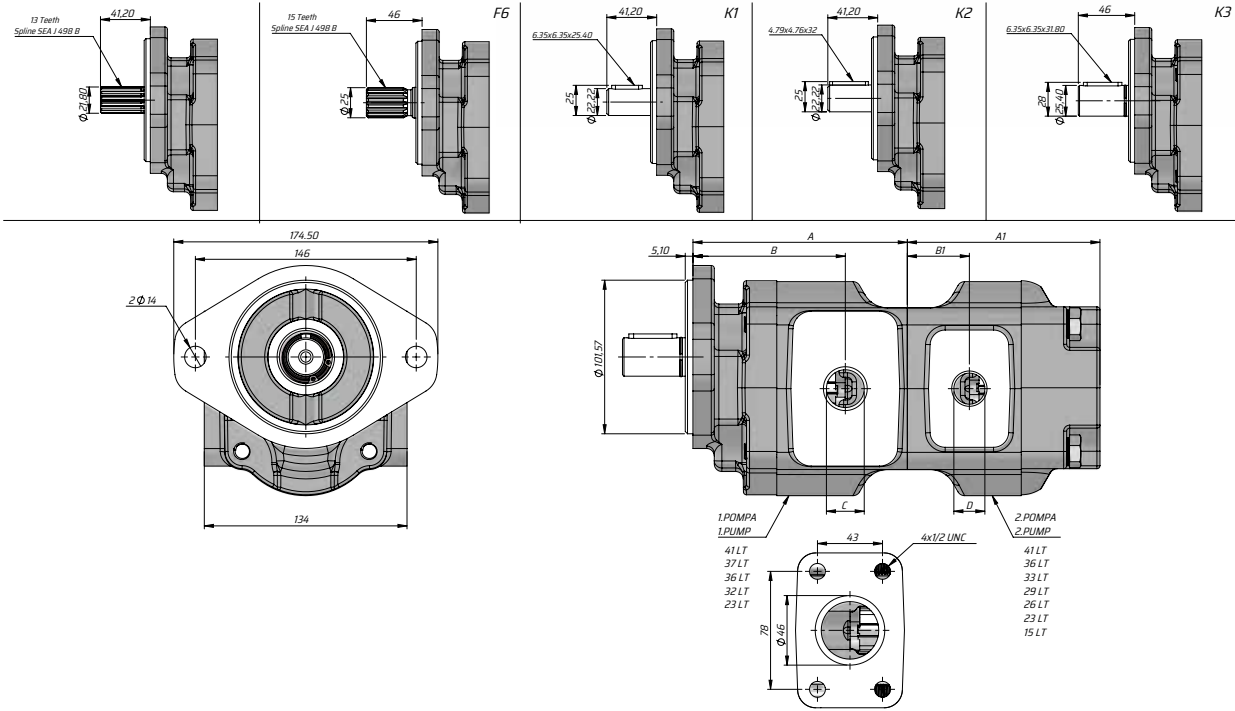

| İletim Hacmi<br>Displacement | Maks. Sürekli Basınç<br>Max. Continuous Pressure | Hız Aralığı<br>Speed Range |                 | A     | B    | A1    | B1   | Çıkış<br>Outlet | Çıkış<br>Outlet |
|------------------------------|--------------------------------------------------|----------------------------|-----------------|-------|------|-------|------|-----------------|-----------------|
|                              |                                                  | (Dev/Dak) (Rev / Min)      |                 |       |      |       |      |                 |                 |
| (cm³/rev)                    | (BAR)                                            | Min.                       | Max. Continuous | (mm)  | (mm) | (mm)  | (mm) | Ç               | D               |
| 41                           | 220                                              | 500                        | 3500            | 147.5 | 106  | -     | -    | 1 1/16"         | -               |
| 37                           | 250                                              |                            |                 | 143   | 102  | -     | -    | 1 1/16"         | -               |
| 36                           | 275                                              |                            |                 | 142   | 101  | -     | -    | 1 1/16"         | -               |
| 33                           |                                                  |                            |                 | -     | -    | 187   | 94   | -               | 7/8"            |
| 32                           |                                                  |                            |                 | 127   | 86   | -     | -    | 1 1/16"         | -               |
| 29                           |                                                  |                            |                 | -     | -    | 130.5 | 89.5 | -               | 7/8"            |
| 26                           |                                                  |                            |                 | -     | -    | 127   | 86   | -               | 7/8"            |
| 23                           |                                                  |                            |                 | -     | -    | 124   | 83   | -               | 7/8"            |
| 15                           |                                                  |                            |                 | -     | -    | -     | -    | -               | -               |