


TEK YÖNLÜ TANDEM DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35
	VG (cSt = mm²/s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ 100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		

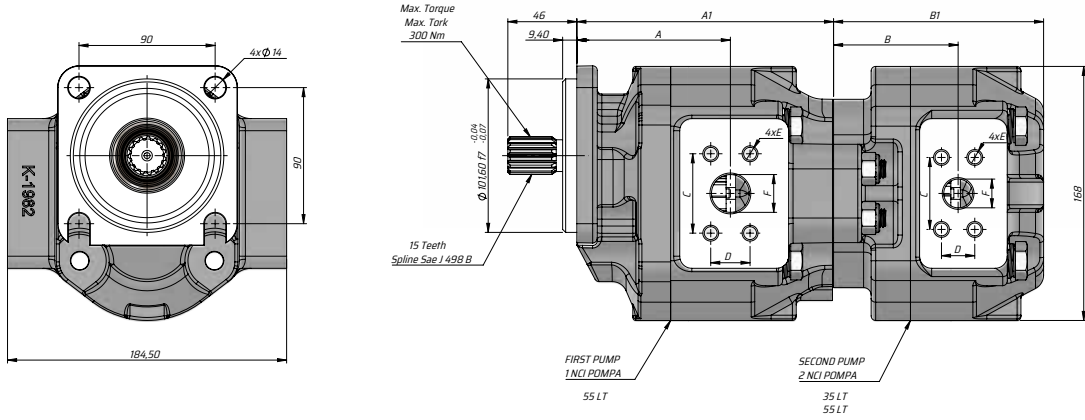

Giriş Inlet	C	D	E	F
	(cm³/rev)			
55 LT 1. Pompa First Pump	70	36	M12	38
55 LT 2. Pompa Second Pump	59	30	M10	32
35 LT 2. Pompa Second Pump	52,50	26		25
Çıkış Outlet	C	D	E	F

Çıkış Outlet	C	D	E	F
	(cm³/rev)			
55 LT 1. Pompa First Pump	52,50	26	M10	25
55 LT 2. Pompa Second Pump				19
35 LT 2. Pompa Second Pump	47,60	22		

İletim Hacmi Displacement	Maks. Sürekli Basınç Max. Continuous Pressure	Maks. Aralıklı Basınç Max. Intermittent pressure	Maks. Anlık Basınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous speed	Maks. Aralıklı Hız Max. Intermittent speed	Min. Hız Min. speed	A	A1	B	B1
(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	(mm)	(mm)
35	240	255	270	2500	3500	300	-	-	82,5	139
55	230	245	260				101,5	169	91	149