



4 DELİKLİ SAE B DİŞLİ POMPA

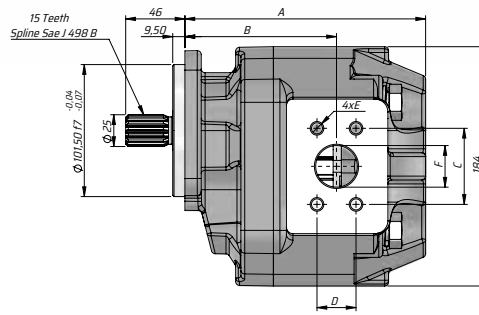

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ 100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			



Kod Code		İletim Hacmi Displacement	Maks. Sürekli Basınç Max. Continuous Pressure	Maks. Aralıklı Basınç Max. Intermittent pressure	Maks. Anlık Basınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous speed	Maks. Aralıklı Hız Max. Intermittent speed	Min. Hız Min. speed	A	B
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec. max)(BAR)	(6 sec. max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)
G22038B4F612	G22038B4F622	38	250	270	280	1500	2500	300	168	101
G22055B4F612	G22055B4F622	55								
G22058B4F612	G22058B4F622	58								
G22070B4F612	G22070B4F622	70								
G22085B4F612	G22085B4F622	85	230	250	270				179	110.5
G22100B4F612	G22100B4F622	100							185	116.5

İletim Hacmi Displacement	Giriş Inlet				Çıkış Outlet			
(cm³/rev)	C	D	E	F	C	D	E	F
38	52.5	26	M10	25.4	47.6	22	M10	19
55	70	36	M12	38	58.5	30		32
58								
70								
85								
100	78	43		51				