

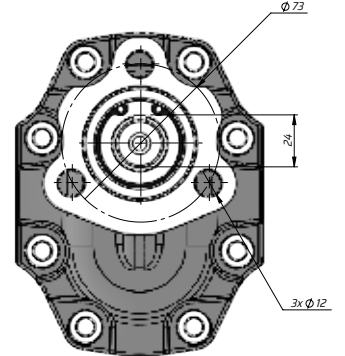


3 DELİKLİ F-UNI DİŞLİ POMPA

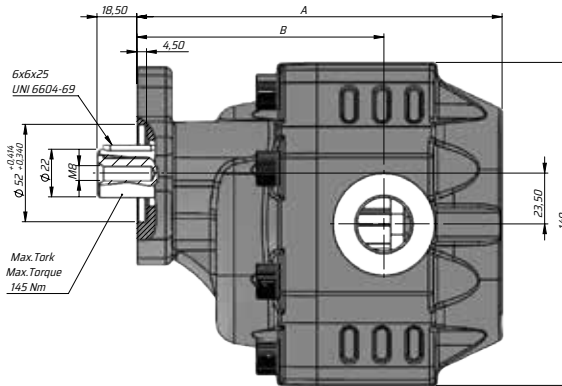

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35
	VG (cSt = mm²/s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ 100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		

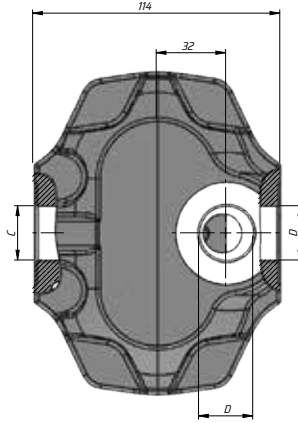

Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	D
G30017FK411	G30017FK421	17	290	315	325	2500	3000	300	151.5	103	G1/2"	G1/2"
G30022FK411	G30022FK421	22							155.5	104.5	G3/4"	
G30027FK411	G30027FK421	27							157.5	108		
G30034FK411	G30034FK421	34	280	300	310	2200	2800		162.5	109		G3/4"
G30043FK411	G30043FK421	43	270	290	300	2000	2500		168.5	114		
G30051FK411	G30051FK421	51	240	260	280				173.5	114		
G30061FK411	G30061FK421	61	220	240	250	1900			183.5	120.5	G1 1/4"	
G30073FK411	G30073FK421	73	205	225	230				186.5	123		
G30082FK411	G30082FK421	82							192.5	124.5		G1 1/4" (Alternative)
G30100FK411	G30100FK421	100	180	200	220	1500	1800		205.5	138.5		
G30125FK411	G30125FK421	125	160	180	200				221.5	142.5		