
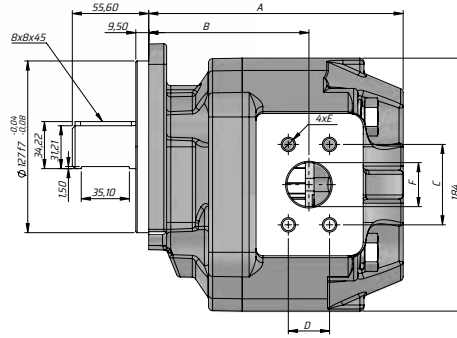


4 DELİKLİ SAE C DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt - 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature		-15°C - +100°C	
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0.3 - 2 bar		



Kod Code		İletim Hacmi Displacement	Maks. Sürekli Basınç Max. Continuous Pressure	Maks. Aralıklı Basınç Max. Intermittent pressure	Maks. Anlık Basınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous speed	Maks. Aralıklı Hız Max. Intermittent speed	Min. Hız Min. speed	A	B
Sol/Left	Sağ/Right	(cm ³ /rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)
G22038C4K1312	G22038C4K1322	38	250	270	280	1500	2500	300	168	101
G22055C4K1312	G22055C4K1322	55								
G22058C4K1312	G22058C4K1322	58								
G22070C4K1312	G22070C4K1322	70								
G22085C4K1312	G22085C4K1322	85	230	250	270				179	110.5
G22100C4K1312	G22100C4K1322	100							185	116.5

İletim Hacmi Displacement	Giriş Inlet				Çıkış Outlet			
(cm³/rev)	C	D	E	F	C	D	E	F
38	52.5	26	M10	25.4	47.6	22	M10	19
55	70	36	M12	38	58.5	30		32
58								
70								
85								
100	78	43		51				