
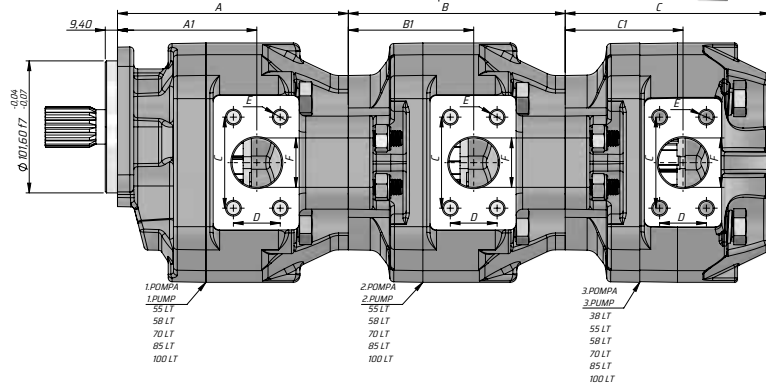




4 HOLES SAE B TANDEM GEAR PUMP

4 DELİKLİ SAE B TANDEM DİŞLİ POMPA

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt - 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature		-15°C +100°C	
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0.3 - 2 bar		

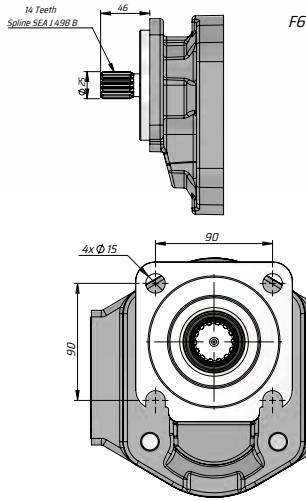

İletim Hacmi Displacement	Maks. Sürekli Basiş Max. Continuous Pressure	Maks. Aralıklı Basiş Max. Intermittent pressure	Maks. Anlık Basiş Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous speed	Maks. Aralıklı Hız Max. Intermittent speed	Min. Hız Min. speed	A	A1	B	B1	C	C1
(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
38	250	270	280	1500	2500	300	-	-	-	-	157,5	90,5
55							177,5	106	167	95,5		
58							178,5	108	168	97,5		
70							187,5	113,5	177	103		
85	230	250	270				187,5	113,5	177	103	168,5	100
100							193,5	116,5	183	106	174,5	106

İletim Hacmi Displacement	Giriş Inlet				Çıkış Outlet			
(cm³/rev)	C	D	E	F	C	D	E	F
38	52.5	26	M10	25.4	47.6	22	M10	19
55	70	36	M12	38	58.5	30		32
58								
70								
85								
100	78	43		51				