

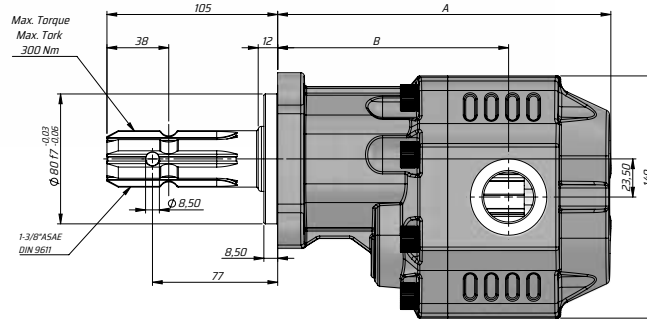


4 DELİKLİ ASAE-L DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 - 2 bar			



Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermitent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	D
G300175F811	G300175F821	17	290	315	325	2500	3000	300	173	124.5	G1/2"	G1/2"
G300225F811	G300225F821	22							177	126	G3/4"	
G300275F811	G300275F821	27							179	129.5		
G300345F811	G300345F821	34	280	300	310	2200	2800		184	130.5	G1"	G3/4"
G300435F811	G300435F821	43	270	290	300	2000	190		135.5			
G300515F811	G300515F821	51	240	260	280		195		135.5			
G300615F811	G300615F821	61	220	240	250	1900	205		142	G1 1/4"	G1"	
G300735F811	G300735F821	73	205	225	230		208		144.5			
G300825F811	G300825F821	82					214		146			
G301005F811	G301005F821	100	180	200	220	1500	1800		227	160	G1 1/4"	G1" G3/4" (Alternative)
G301255F811	G301255F821	125	160	180	200				243	164		