




4 DELİKLİ TRC DİŞLİ POMPA

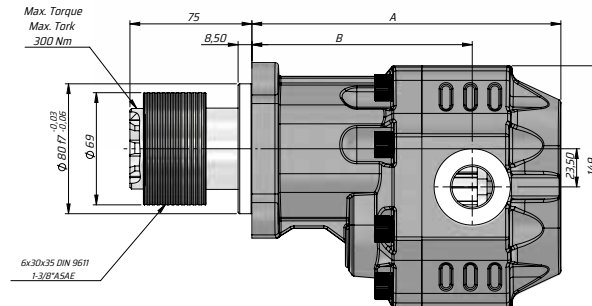

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt + 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature		-15°C +100°C	
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 + 2 bar		



Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basınç Max. Intermittent Pressure	Maks. Anlık Basınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet	
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	Ç	D
G300175F311	G300175F321	17	290	315	325	2500	3000	300	173	124.5	G1/2"	G1/2"
G300225F311	G300225F321	22							177	126	G3/4"	
G300275F311	G300275F321	27							179	129.5		
G300345F311	G300345F321	34	280	300	310	2200	2800		184	130.5	G1"	G3/4"
G300435F311	G300435F321	43	270	290	300	2000	2500		190	135.5		
G300515F311	G300515F321	51	240	260	280				195	135.5		
G300615F311	G300615F321	61	220	240	250	1900			2500	205	142	G1 1/4"
G300735F311	G300735F321	73	205	225	230		208			144.5		
G300825F311	G300825F321	82					214			146		
G301005F311	G301005F321	100	180	200	220	1500	1800		227	160	G1 1/4"	G1" G3/4" (Alternative)
G301255F311	G301255F321	125	160	180	200				243	164		