

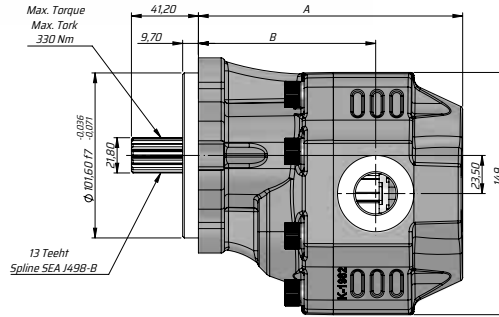


2+4 DELİKLİ SAE B 13 DİŞ DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			



Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	D
G30017BF511	G30017BF521	17	290	315	325	2500	3000	300	151.5	103	G1/2"	G1/2"
G30022BF511	G30022BF521	22							155.5	104.5	G3/4"	
G30027BF511	G30027BF521	27							157.5	108		
G30034BF511	G30034BF521	34	280	300	310	2200	2800		162.5	109	G1"	G3/4"
G30043BF511	G30043BF521	43	270	290	300	2000	168.5		114			
G30051BF511	G30051BF521	51	240	260	280		173.5		114			
G30061BF511	G30061BF521	61	220	240	250	1900	2500		183.5	120.5	G1 1/4"	G1"
G30073BF511	G30073BF521	73	205	225	230				186.5	123		
G30082BF511	G30082BF521	82							192.5	124.5		
G30100BF511	G30100BF521	100	180	200	220	1500	1800		205.5	138.5	G1 1/4"	G1" G3/4" (Alternative)
G30125BF511	G30125BF521	125	160	180	200				221.5	142.5		