


CHELSEA 13T FREZELİ MONTAJ

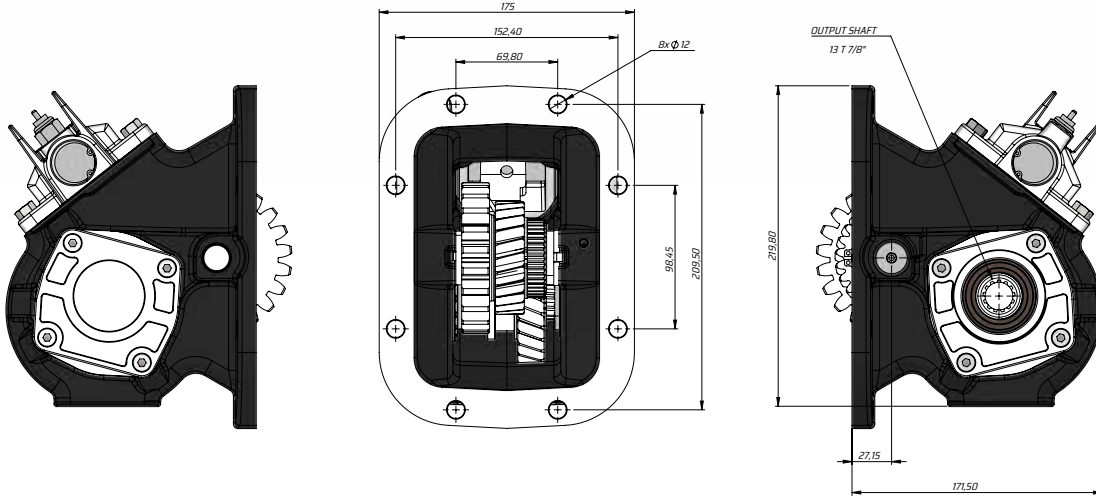

Aralıklı Tork Intermittent Torque	Vites tipi Shift type	Güç Out Power	Ürün Serisi Product Series	Yağlayıcı Lubricant	Çıkış Milî Tipi Output Shaft Type	Mil Gücü Shaft Power	Sürekli Tork Continuous Torque
201 to 300 lb-ft, 301 to 400 NM	Direct Mount	46 to 55 HP 31 to 40 kW	489	No Pressure Lube Pressure Lube	SAE B (7/8" - 13 T) Pump Spline	24 HP (500 RPM), 48 HP (1000 RPM), 18 kW (500 RPM), 36 kW (1000 RPM)	De-Rate Torque Rating 30% (Check Application Pages for Actual Torque Ratings)