
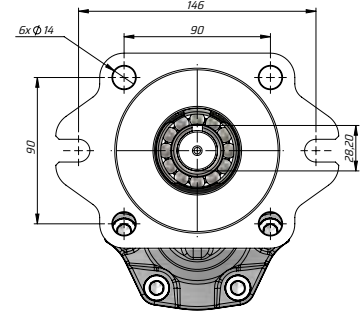
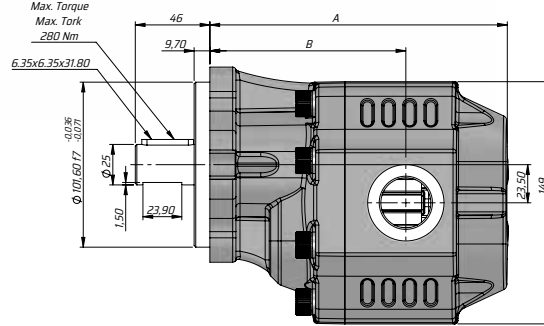


2+4 DELİKLİ SAE B KAMALI DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35
	VG (cSt = mm²/s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt - 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0.3 - 2 bar		

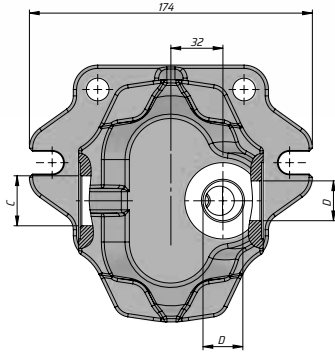

Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet	
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	D	
G30017BK311	G30017BK321	17	290	315	325	2500	3000	300	151.5	103	G1/2"	G1/2"	
G30022BK311	G30022BK321	22							155.5	104.5	G3/4"		
G30027BK311	G30027BK321	27							157.5	108			
G30034BK311	G30034BK321	34	280	300	310	2200	2800		162.5	109	G1"	G3/4"	
G30043BK311	G30043BK321	43	270	290	300	2000	2500		168.5	114			
G30051BK311	G30051BK321	51	240	260	280				173.5	114			
G30061BK311	G30061BK321	61	220	240	250	1900	2500		183.5	120.5	G1 1/4"	G1"	
G30073BK311	G30073BK321	73	205	225	230								
G30082BK311	G30082BK321	82											
G30100BK311	G30100BK321	100	180	200	220	1500	1800		192.5	124.5	G1 1/4"	G1" G3/4" (Alternative)	
G30125BK311	G30125BK321	125	160	180	200				205.5	138.5			
									221.5	142.5			