




## 4 DELİKLİ ISO TEK YÖNLÜ DİŞLİ POMPA

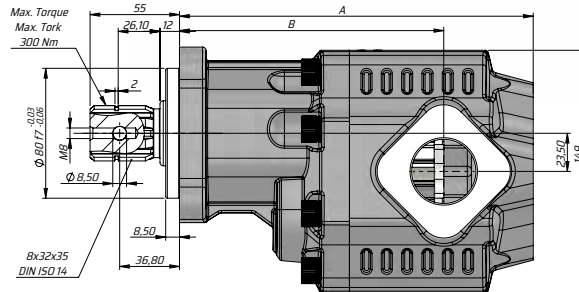

HİDROLİK SEMBOL  
HYDRAULIC SYMBOL

|                                                   |                                                                                |                                      |        |       |      |
|---------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------|--------|-------|------|
| Fluid                                             | Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon |                                      |        |       |      |
| Kinematic viscosity suggested                     | Average ambient temp. (°C)                                                     | < -10                                | -10-10 | 10-35 | > 35 |
|                                                   | VG (cSt = mm²/s)                                                               | 22                                   | 32     | 46    | 68   |
| Optimale kinematic viscosity                      |                                                                                | VG= 10 cSt ÷ 100 cSt                 |        |       |      |
| Max kinematic viscosity suggested at the start-up |                                                                                | VG= 750 cSt                          |        |       |      |
| Viscosity index suggested                         | VI > 100                                                                       | Working temperature -15°C ÷ 100°C    |        |       |      |
| Oil filtering                                     |                                                                                | > 200 bar: 10 µm<br>< 200 bar: 25 µm |        |       |      |
| Inlet pressure                                    |                                                                                | -0,3 ÷ 2 bar                         |        |       |      |



| Kod<br>Code |             | İletim hacmi<br>Displacement | Max. Sürekli<br>Basıncı<br>Max. Continuous<br>pressure | Maks. Aralıklı<br>Basıncı<br>Max. Intermittent<br>Pressure | Maks. Anlık Basıncı<br>Max. Peak<br>Pressure | Maks. Sürekli<br>Hız<br>Max. Continuous<br>Speed | Maks. Aralıklı Hız<br>Max. Intermittent<br>Speed | Min.<br>Hız<br>Min.<br>Speed | A     | B     | Sol/Left-Sağ/Right |                 |
|-------------|-------------|------------------------------|--------------------------------------------------------|------------------------------------------------------------|----------------------------------------------|--------------------------------------------------|--------------------------------------------------|------------------------------|-------|-------|--------------------|-----------------|
|             |             |                              |                                                        |                                                            |                                              |                                                  |                                                  |                              |       |       | Giriş<br>Inlet     | Çıkış<br>Outlet |
| Sol/Left    | Sağ/Right   | (cm³/rev)                    | (100%)(BAR)                                            | (20 sec.max)(BAR)                                          | (6 sec.max)(BAR)                             | (RPM)                                            | (RPM)                                            | RPM                          | (mm)  | (mm)  | Ç                  | D               |
| G300275F118 | G300275F128 | 27                           | 290                                                    | 315                                                        | 325                                          | 2500                                             | 3000                                             | 300                          | 187.5 | 139.5 | G3/4"              | G1/2"           |
| G300345F118 | G300345F128 | 34                           | 280                                                    | 300                                                        | 310                                          | 2200                                             | 2800                                             |                              | 192.5 | 144.5 |                    |                 |
| G300385F118 | G300385F128 | 38                           |                                                        |                                                            |                                              |                                                  |                                                  |                              | 195.5 | 147.5 |                    |                 |
| G300435F118 | G300435F128 | 43                           | 270                                                    | 290                                                        | 300                                          | 2000                                             | 2500                                             |                              | 198.5 | 150.5 | G1"                | G3/4"           |
| G300515F118 | G300515F128 | 51                           | 240                                                    | 260                                                        | 280                                          |                                                  |                                                  |                              | 203.5 | 147.5 |                    |                 |
| G300555F118 | G300555F128 | 55                           | 230                                                    | 250                                                        | 275                                          |                                                  |                                                  |                              | 206.5 | 151.5 |                    |                 |
| G300615F118 | G300615F128 | 61                           | 220                                                    | 240                                                        | 250                                          | 1900                                             |                                                  |                              | 209.5 | 154.5 | G1 1/4"            | G1"             |
| G300735F118 | G300735F128 | 73                           | 205                                                    | 225                                                        | 230                                          | 1900                                             |                                                  |                              | 217.5 | 162.5 |                    |                 |