

3 HOLES UNI UNIDIRECTIONAL GEAR PUMP




3 DELİKLİ UNI TEK YÖNLÜ DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL



Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, PPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt - 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100		Working temperature -15°C +100°C		
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 - 2 bar		

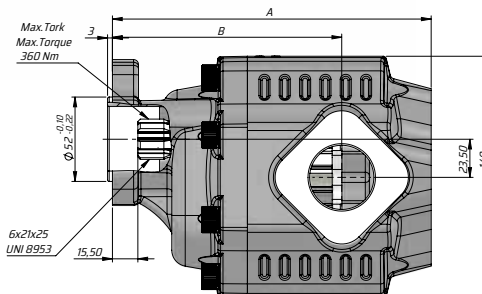

Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Sol/Left- Sağ/Right		
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	Giriş Inlet	Çıkış Outlet	
G30027UF4B	G30027UF42B	27	290	315	325	2500	3000	300	166	118	G3/4"	G1/2"	
G30034UF4B	G30034UF42B	34	280	300	310	2200	2800		171	123		G1"	G3/4"
G30038UF4B	G30038UF42B	38							174	126			
G30043UF4B	G30043UF42B	43	270	290	300	2000	2500		177	129			
G30051UF4B	G30051UF42B	51	240	260	280				182	126			
G30055UF4B	G30055UF42B	55	230	250	275	1900			1900	185	130		
G30061UF4B	G30061UF42B	61	220	240	250					188	133		
G30073UF4B	G30073UF42B	73	205	225	230	1900	1900		196	141	G1 1/4"	G1"	