

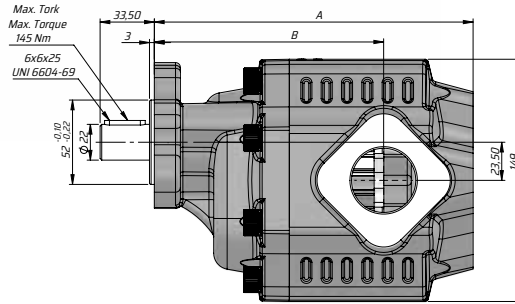


3 DELİKLİ F-UNI TEK YÖNLÜ DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			



Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Sol/Left- Sağ/Right		
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	Giriş Inlet	Çıkış Outlet	
G30027UK518	G30027UK528	27	290	315	325	2500	3000	300	166	118	G3/4"	G1/2"	
G30034UK518	G30034UK528	34	280	300	310	2200	2800		171	123		G3/4"	
G30038UK518	G30038UK528	38							174	126			
G30043UK518	G30043UK528	43	270	290	300	2000	2500		177	129			G1"
G30051UK518	G30051UK528	51	240	260	280				182	126			
G30055UK518	G30055UK528	55	230	250	275	1900			185	130			
G30061UK518	G30061UK528	61	220	240	250				188	133			
G30073UK518	G30073UK528	73	205	225	230	1900			196	141	G1 1/4"	G1"	