




4 DELİKLİ KAMALI K ADAPTÖRLÜ DİŞLİ POMPA

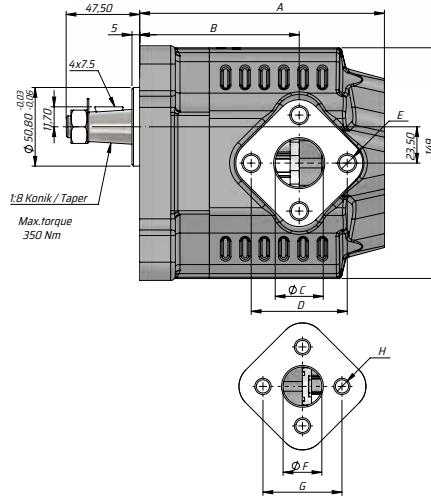

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ 100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			



Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Başınç Max. Intermittent Pressure	Maks. Anlık Başınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Sol/Left Sağ/Right			Bd		
											Giriş Inlet			Çıkış Outlet		
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	D	E	F	G	H
G30027KK619	G30027KK629	27	290	315	325	2500	3000	300	128	80	25	51	M10	19	40	M8
G30034KK619	G30034KK629	34	280	300	310	2200	2800		133	85						
G30038KK619	G30038KK629	38							136	88						
G30043KK619	G30043KK629	43	270	290	300	2000	2500		139	91						
G30051KK619	G30051KK629	51	240	260	280				144	88						
G30055KK619	G30055KK629	55	230	250	275				147	92						
G30061KK619	G30061KK629	61	220	240	250	1900			150	95						
G30073KK619	G30073KK629	73	205	225	230	1900	158		103							