

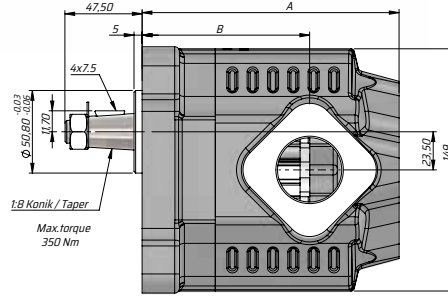


4 DELİKLİ KAMALI K TEK YÖNLÜ DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ~ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 - 2 bar			



Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Sol/Left-Sağ/Right			
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	Giriş Inlet	Çıkış Outlet		
G30027KK618	G30027KK628	27	290	315	325	2500	3000	300	128	80	G3/4"	G1/2"		
G30034KK618	G30034KK628	34	280	300	310	2200	2800		133	85		G3/4"		
G30038KK618	G30038KK628	38							136	88				
G30043KK618	G30043KK628	43	270	290	300	2000	2500		139	91	G1"		G3/4"	
G30051KK618	G30051KK628	51	240	260	280				144	88				
G30055KK618	G30055KK628	55	230	250	275	147			92	G1"				
G30061KK618	G30061KK628	61	220	240	250	1900			150		95	G1 1/4"	G1"	
G30073KK618	G30073KK628	73	205	225	230	1900			158		103			