


4 DELİKLİ ASAE-S TEK YÖNLÜ DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10~10	10~35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ~ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C ~ 100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ~ 2 bar			

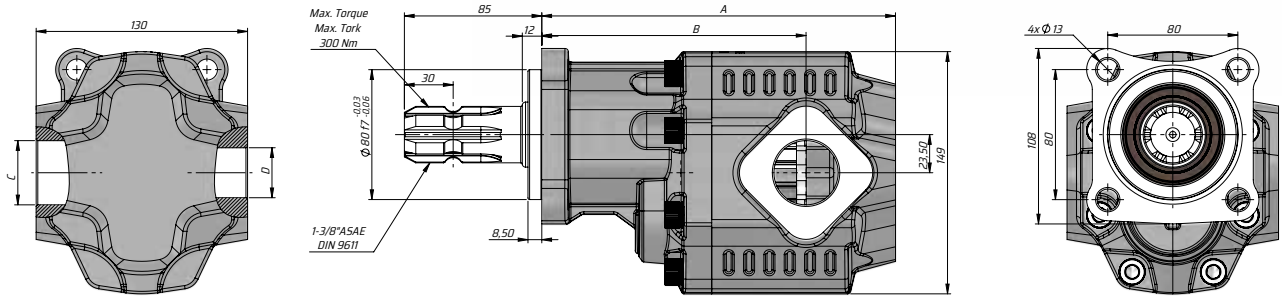

Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Sol/Left-Sağ/Right	
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	Giriş Inlet	Çıkış Outlet
G300275F218	G300275F228	27	290	315	325	2500	3000	300	187.5	139.5	G3/4"	G1/2"
G300345F218	G300345F228	34	280	300	310	2200	2800		192.5	144.5		G3/4"
G300385F218	G300385F228	38							195.5	147.5		
G300435F218	G300435F228	43	270	290	300	2000	2500		198.5	150.5	G1"	
G300515F218	G300515F228	51	240	260	280				203.5	147.5		
G300555F218	G300555F228	55	230	250	275				206.5	151.5		
G300615F218	G300615F228	61	220	240	250	1900	209.5		154.5	G1 1/4"	G1"	
G300735F218	G300735F228	73	205	225	230	1900	217.5		162.5			