

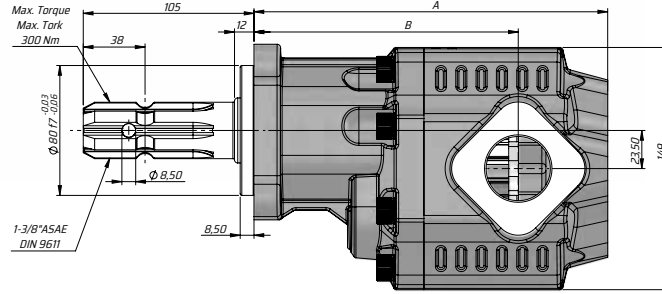


4 DELİKLİ ASAE-L TEK YÖNLÜ DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			



Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Sol/Left- Sağ/Right	
											Giriş Inlet	Çıkış Outlet
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	D
G300275F818	G300275F828	27	290	315	325	2500	3000	300	187.5	139.5	G3/4"	G1/2"
G300345F818	G300345F828	34	280	300	310	2200	2800		192.5	144.5		G3/4"
G300385F818	G300385F828	38							195.5	147.5		
G300435F818	G300435F828	43	270	290	300	2000	2500		198.5	150.5	G1"	
G300515F818	G300515F828	51	240	260	280				203.5	147.5		
G300555F818	G300555F828	55	230	250	275	206.5			151.5			
G300615F818	G300615F828	61	220	240	250	1900			209.5	154.5	G1 1/4"	G1"
G300735F818	G300735F828	73	205	225	230	1900			217.5	162.5		