




4 DELİKLİ TRC TEK YÖNLÜ DİŞLİ POMPA

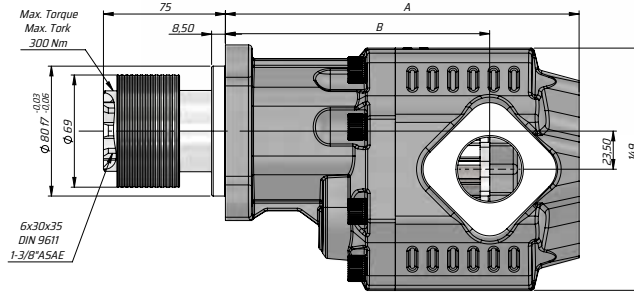

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35
	VG (cSt = mm²/s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		



Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Sol/Left- Sağ/Right		
											Giriş Inlet	Çıkış Outlet	
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	D	
G300275F318	G300275F328	27	290	315	325	2500	3000	300	187,5	139,5	G3/4"	G1/2"	
G300345F318	G300345F328	34	280	300	310	2200	2800		192,5	144,5		G3/4"	G3/4"
G300385F318	G300385F328	38							195,5	147,5			
G300435F318	G300435F328	43	270	290	300	2000	2500		198,5	150,5	G1"	G1"	
G300515F318	G300515F328	51	240	260	280				203,5	147,5			
G300555F318	G300555F328	55	230	250	275				206,5	151,5			
G300615F318	G300615F328	61	220	240	250	1900			209,5	154,5	G1 1/4"	G1"	
G300735F318	G300735F328	73	205	225	230	1900			217,5	162,5			