




2+4 DELİKLİ SAE B 15 DİŞ TEK YÖNLÜ DİŞLİ POMPA

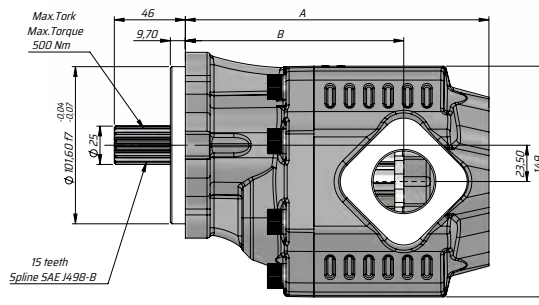

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35
	VG (cSt = mm ² /s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		



Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Sol/Left- Sağ/Right		
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	Giriş Inlet	Çıkış Outlet	
G30027BF618	G30027BF628	27	290	315	325	2500	3000	300	166	118	G3/4"	G1/2"	
G30034BF618	G30034BF628	34	280	300	310	2200	2800		171	123		G3/4"	G3/4"
G30038BF618	G30038BF628	38							174	126			
G30043BF618	G30043BF628	43	270	290	300	2000	2500		177	129	G1"	G3/4"	
G30051BF618	G30051BF628	51	240	260	280				182	126			
G30055BF618	G30055BF628	55	230	250	275				185	130	G1"	G3/4"	
G30061BF618	G30061BF628	61	220	240	250	1900			188	133			
G30073BF618	G30073BF628	73	205	225	230	1900			196	141	G1 1/4"	G1"	