


2+4 DELİKLİ SAE B TEK YÖNLÜ KAMALI DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt + 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature		-15°C +100°C	
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 + 2 bar		

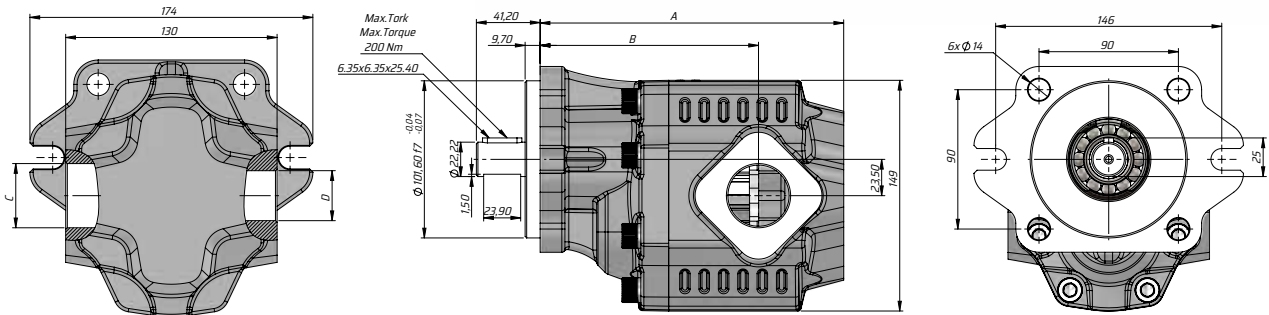

Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Sol/Left-Sağ/Right		
											Giriş Inlet	Çıkış Outlet	
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	Ç	D	
G30027BK118	G30027BK128	27	290	315	325	2500	3000	300	166	118	G3/4"	G1/2"	
G30034BK118	G30034BK128	34	280	300	310	2200	2800		171	123		G3/4"	G3/4"
G30038BK118	G30038BK128	38							174	126			
G30043BK118	G30043BK128	43	270	290	300	2000	2500		177	129	G1"		
G30051BK118	G30051BK128	51	240	260	280				182	126			
G30055BK118	G30055BK128	55	230	250	275	1900	2500		185	130	G1"	G3/4"	
G30061BK118	G30061BK128	61	220	240	250				188	133			
G30073BK118	G30073BK128	73	205	225	230				1900	2500	196	141	G1 1/4"