
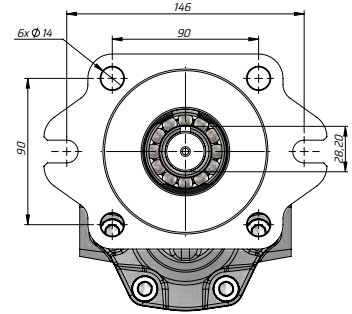
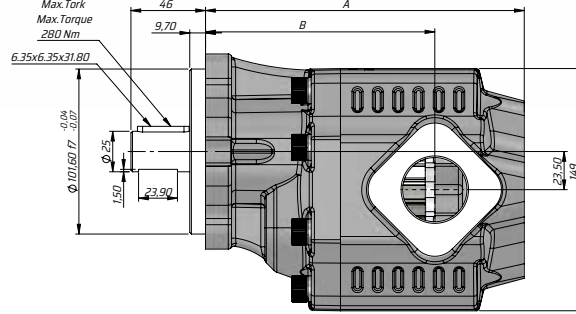


2+4 DELİKLİ SAE B TEK YÖNLÜ KAMALI DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ~ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 - 2 bar			



Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Sol/Left-Sağ/Right			
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	Giriş Inlet	Çıkış Outlet		
G30027BK318	G30027BK328	27	290	315	325	2500	3000	300	166	118	G3/4"	G1/2"		
G30034BK318	G30034BK328	34	280	300	310	2200	2800		171	123		G3/4"		
G30038BK318	G30038BK328	38							174	126				
G30043BK318	G30043BK328	43	270	290	300	2000	2500		177	129	G1"		G3/4"	
G30051BK318	G30051BK328	51	240	260	280				182	126				
G30055BK318	G30055BK328	55	230	250	275	1900			185	130	G1 1/4"	G1"		
G30061BK318	G30061BK328	61	220	240	250				188	133				
G30073BK318	G30073BK328	73	205	225	230	1900			196	141				