




4 DELİKLİ ISO ÇİFT YÖNLÜ DİŞLİ POMPA

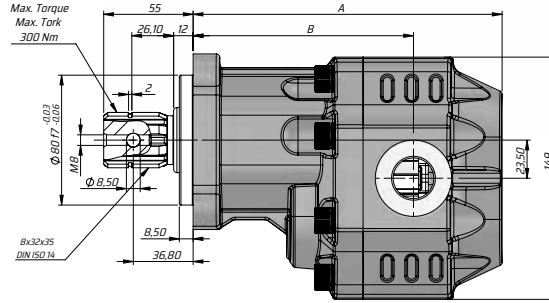

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm²/s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ÷ 2 bar			



Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermitent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet	
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	C	
G300175F131	17	290	315	325	2500	3000	300	173	124.5	G1/2"	G1/2"	
G300225F131	22							177	126			
G300275F131	27							179	129.5			
G300345F131	34	280	300	310	2200	2800		184	130.5	G3/4"	G3/4"	
G300435F131	43	270	290	300	2000	2500		190	135.5			
G300515F131	51	240	260	280				195	135.5			
G300615F131	61	220	240	250				205	142	G1"	G1"	
G300735F131	73	205	225	230	1900	2500		208	144.5			
G300825F131	82							214	146			
G301005F131	100	180	200	220	1500	1800		227	160	G1 1/4"	G1 1/4"	
G301255F131	125	160	180	200				243	164			