




3 DELİKLİ F-UNI ÇİFT YÖNLÜ DİŞLİ POMPA

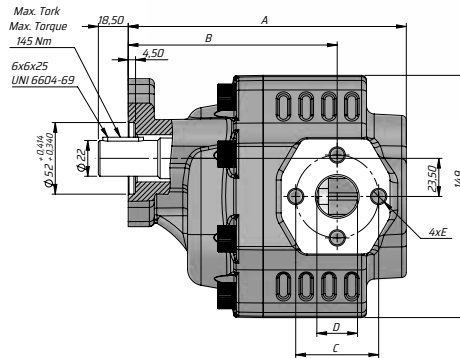

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10~10	10~35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt ~ 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C ~ 100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 ~ 2 bar			



Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet			Çıkış Outlet			
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	D	E	C	D	E	
G30022FK432	22	290	315	325	2500	3000	300	154	118.50	51	25	M10	51	25	M10	
G30027FK432	27							160	118.50							
G30034FK432	34	280	300	310	2200	2800		165	122.50							
G30043FK432	43	270	290	300	2000	2500		171	128.50							
G30051FK432	51	240	260	280				176	125.50							
G30061FK432	61	220	240	250	1900			184	132.50							
G30082FK432	82	205	225	230				195	140.50	62	33	M12	62	33	M12	