
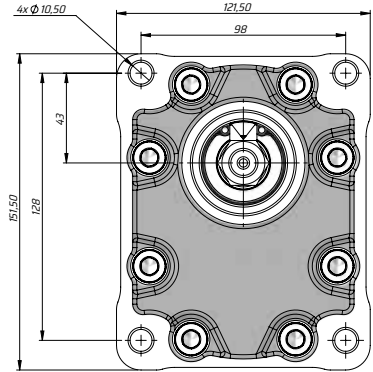
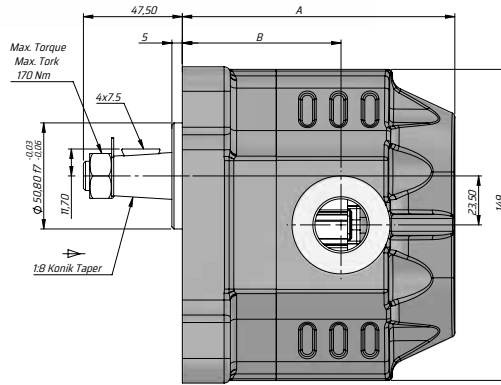


4 DELİKLİ KAMALI K ÇİFT YÖNLÜ DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimale kinematic viscosity			VG= 10 cSt + 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature		-15°C +100°C	
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0.3 - 2 bar		



Kod Code	İletim hacmi Displacement	Maks. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	C
G30017KK631	17	290	315	325	2500	3000	300	113.5	65	G1/2"	G1/2"
G30022KK631	22							117.5	66.5		
G30027KK631	27							119.5	70		
G30034KK631	34	280	300	310	2200	2800		124.5	71	G3/4"	G3/4"
G30043KK631	43	270	290	300	2000	2500		130.5	76		
G30051KK631	51	240	260	280				135.5	76		
G30061KK631	61	220	240	250	1900	2500		145.5	82.5	G1"	G1"
G30073KK631	73	205	225	230				148.5	85		
G30082KK631	82							154.5	86.5		
G30100KK631	100	180	200	220	1500	1800		167.5	100.5	G1 1/4"	G1 1/4"
G30125KK631	125	160	180	200				183.5	104.5		