

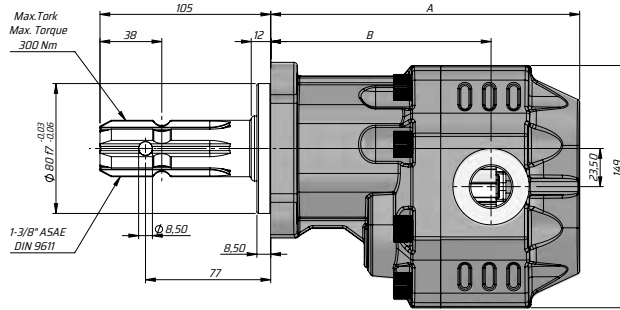


4 DELİKLİ ASAE-L ÇİFT YÖNLÜ DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35	> 35
	VG (cSt = mm ² /s)	22	32	46	68
Optimale kinematic viscosity		VG= 10 cSt - 100 cSt			
Max kinematic viscosity suggested at the start-up		VG= 750 cSt			
Viscosity index suggested	VI > 100	Working temperature -15°C +100°C			
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm			
Inlet pressure		-0,3 - 2 bar			



Kod Code	İletim hacmi Displacement	Maks. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	C
G30017SF831	17	290	315	325	2500	3000	300	173	124.5	G1/2"	G1/2"
G30022SF831	22							177	126		
G30027SF831	27							179	129.5		
G30034SF831	34	280	300	310	2200	2800		184	130.5	G3/4"	G3/4"
G30043SF831	43	270	290	300	2000	190		135.5			
G30051SF831	51	240	260	280		195		135.5			
G30061SF831	61	220	240	250		1900		205	142	G1"	G1"
G30073SF831	73	205	225	230	208			144.5			
G30082SF831	82				214			146			
G30100SF831	100	180	200	220	1500	1800		227	160	G1 1/4"	G1 1/4"
G30125SF831	125	160	180	200				243	164		