

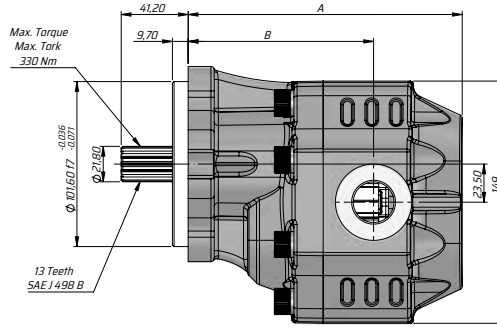


2+4 DELİKLİ SAE B 13 DİŞ ÇİFT YÖNLÜ DİŞLİ POMPA


 HİDROLİK SEMBOL
 HYDRAULIC SYMBOL


Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon			
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10-10	10-35
	VG (cSt = mm²/s)	22	32	46
Optimale kinematic viscosity		VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up		VG= 750 cSt		
Viscosity index suggested	VI > 100	Working temperature -15°C ÷ 100°C		
Oil filtering		> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure		-0,3 ÷ 2 bar		



Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basıncı Max. Intermittent Pressure	Maks. Anlık Basıncı Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet				
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	C				
G30017BF531	17	290	315	325	2500	3000	300	151.5	103	G1/2"	G1/2"				
G30022BF531	22							155.5	104.5						
G30027BF531	27							157.5	108						
G30034BF531	34	280	300	310	2200	2800		162.5	109	G3/4"	G3/4"				
G30043BF531	43	270	290	300	2000	2500		168.5	114						
G30051BF531	51	240	260	280				173.5	114						
G30061BF531	61	220	240	250	1900	2500		183.5	120.5	G1"	G1"				
G30073BF531	73	205	225	230				186.5	123						
G30082BF531	82							192.5	124.5						
G30100BF531	100	180	200	220	1500	1800		205.5	138.5	G1 1/4"	G1 1/4"				
G30125BF531	125	160	180	200				221.5	142.5						